


CONELOG®
SYSTEM

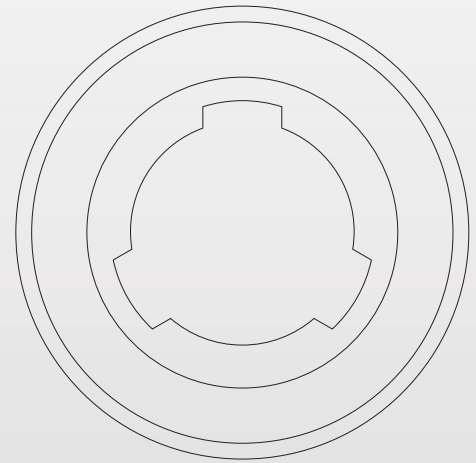

PRODUCT CATALOG 2014

Valid from May 2014

a perfect fit™

camlog

ADDED VALUE THROUGH COMPETENCE IN IMPLANTOLOGY

A partnership with CAMLOG encompasses the exceptional price-performance ratio of the CONELOG® Products and a custom-built service program. CAMLOG's specific expertise clearly encompasses more than the product, its safety and ease of use. With all our implant expertise, we are fully committed to our customers. Rediscover the implant expertise of CAMLOG in your daily routine time and time again, and turn it into your own added value.

We are happy to help.

FOR PERFECTIONISTS

FOR MINIMALISTS

FOR FANS



THE CONELOG® IMPLANT SYSTEM	2	CONELOG® PROSTHETICS	37
SYSTEM INFORMATION			
NEW PRODUCTS	2	PROSTHETICS OVERVIEW	38
SURGERY	11	TORQUE WRENCH SETTINGS	42
PLANNING	12	IMPRESSION TAKING, BITE REGISTRATION,	
X-RAY PLANNING FOILS AND TRANSFER PICTURES	12	FABRICATION OF THE PLASTER MODEL	44
CT-PLANNING	13	IMPRESSION TAKING, OPEN/CLOSED TRAY	44
		BITE REGISTRATION	44
		FABRICATION OF THE PLASTER MODEL	45
IMPLANT OVERVIEW	14	CROWN AND BRIDGE RESTORATIONS	45
CONELOG® SCREW-LINE IMPLANTS	15	CONELOG® TEMPORARY ABUTMENT	45
SURGERY SET CAMLOG®/CONELOG® SCREW-LINE	16	CONELOG® ESTHOMIC® ABUTMENTS	45
SURGICAL INSTRUMENTS SCREW-LINE	17	CONELOG® UNIVERSAL ABUTMENT	47
OSTEOTOMY SET SCREW-LINE	20	CONELOG® GOLD-PLASTIC ABUTMENT	47
		CONELOG® LOGFIT® ABUTMENTS	47
GUIDE SYSTEM	24	ACCESSORIES FOR CONELOG® ABUTMENTS	48
CONELOG® HEALING CAPS	30	CROWN, BRIDGE AND HYBRID RESTORATIONS	49
ALTAPIN SET	31	CONELOG® TITANIUM BASES CAD/CAM	49
		ACCESSORIES FOR CAD/CAM PROSTHETICS	50
INSTRUMENTS	32	CONELOG® VARIO SR ABUTMENTS	51
SURGICAL INSTRUMENTS	32	ACCESSORIES FOR VARIO SR	53
SURGICAL-PROSTHETIC INSTRUMENTS	34	HYBRID RESTORATIONS	54
PROSTHETIC INSTRUMENTS	35	CONELOG® BAR ABUTMENTS	54
		CONELOG® BALL ABUTMENTS	56
		CONELOG® LOCATOR® ABUTMENTS	58
		CONELOG® UNIVERSAL ABUTMENT	61
		CONELOG® TELESCOPE ABUTMENT	61
		ACCESSORIES FOR CONELOG® ABUTMENTS	61
		INSTRUMENTS FOR DENTAL TECHNICIANS	62
		CONELOG® SELECTION ABUTMENTS	63
		AUXILIARY ARTICLES	65
		INFORMATION	69
		INDEX	73
		ALPHABETICAL	74
		ARTICLE NUMBER	81
		ORDER FORM	87

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION

GENERAL SYSTEM INFORMATION ABOUT THE CAMLOG® AND CONELOG® IMPLANT SYSTEM

The CONELOG® Implant System is based on the many years of clinical and laboratory experience with the CAMLOG® Implant System. The CONELOG® Implant System is a user-friendly, consistently prosthesis-oriented implant system.

All CAMLOG® and CONELOG® Products are continuously fabricated based on the latest state of technology. The CAMLOG® and CONELOG® Implant System was progressively enhanced through in-house research and development in collaboration with hospitals, universities and dental technicians. Today, it represents the state of the art in implant dentistry.

The CAMLOG® Implant System is well documented scientifically. Numerous studies based on various parameters, e.g. implant surface, time of implantation and/or implant loading, primary stability, connection design or type of superstructure, support this. The long-term outcomes for the CAMLOG® Implant System are persuasive.

NEW PRODUCTS

GUIDE SYSTEM

The CAMLOG® Guide System for template-guided implant bed preparation and insertion has been extended by the CONELOG® SCREW-LINE Implants and is now called Guide System.

Guide System CONELOG® SCREW-LINE Implants are available with a 3.3 mm diameter in the lengths 9, 11, 13 and 16 mm as well as with 3.8 and 4.3 mm diameters in the lengths 7, 9, 11, 13 and 16 mm.

Newly available are guided pilot drills and a driver with ISO shaft for Guide System implants. The form drills were fitted with a four-edged cutting geometry with chip grooves to provide greater smoothness of operation. The guiding sleeves were shortened by 1 mm for minimally invasive implantation at greater gingival thickness, provided with opposing bevels for use in narrow tooth gaps and fitted with a marking to give better groove alignment. The template drills are fitted newly with a spiral-shaped cutting edge and a longer shaft. All drills, gingiva punches, insertion posts and guiding sleeves are color-coded throughout.

The new Guide System comprises 85 items.

LOCATOR®

A new replacement male is available for the Locator® Anchoring system for extended range without retention. The replacement male is colored gray and serves to adapt the cumulated retention force of a Locator® retained prosthesis on implants with diameters 3.8/4.3/5.0 mm.

CONELOG® SCANPOSTS FOR SIRONA SCANBODY

In conjunction with the Sirona Scanbodies the new CONELOG® ScanPosts serve for the digital recording of the implant position or laboratory analog position in relation to the remaining teeth and the soft tissue.

CONELOG® TITANIUM BASE CAD/CAM

In future, the Sirona inCoris ZI meso blocks can also be used with the CONELOG® Implant System. The newly modified CONELOG® Titanium base CAD/CAM, including the dark purple, anodized abutment screw and a bonding aid, will be available in the gingival heights 0.8 mm and 2.0 mm from September 2014 with a new article number.

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION


CONELOG® SCREW-LINE IMPLANTS

CONELOG® SCREW-LINE Implants are endosseous implants, available in different lengths and diameters. They are placed surgically in the maxillary and/or mandibular bone and serve as anchors for functional and esthetic oral rehabilitations in partial or fully edentulous patients. The prosthetic treatment is then completed with single crowns, bridges or full dentures, which are fastened to the corresponding CONELOG® Components with the CONELOG® SCREW-LINE Implants. Different implant sizes can be used in the same arch.

The CONELOG® SCREW-LINE Implant represents a conical self-tapping screw implant in its geometry and is available with the Promote® surface.

Implantation

CONELOG® SCREW-LINE Implants are intended as immediate or delayed immediate implants. The selected healing technique can be either submerged or transgingival. The taper of the outer implant body of 3° – 9° (depending on length and diameter) allows easy insertion due to self-centering.

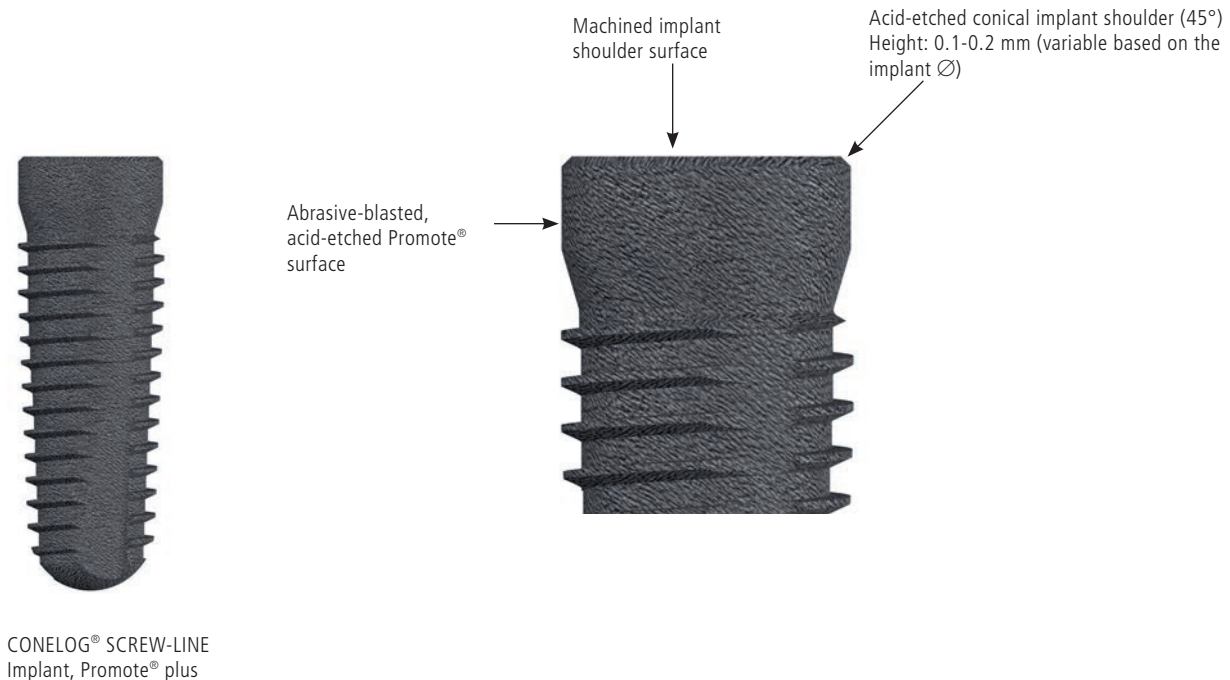

THE CONELOG® IMPLANT SYSTEM


SYSTEM INFORMATION

Promote® surface

The CONELOG® SCREW-LINE Implant is available with the Promote® surface. The abrasive-blasted, acid-etched Promote® surface extends over the entire body of the implant to the acid-etched 45° implant shoulder.

The Promote® surface has proven its worth as a surface for anchoring dental implants in the bone and has shown good scientific results in osteohistology and in pull-out trials.

The results suggest that the Promote® surface leads to rapid osseointegration of the CONELOG® Implants.




Promote® surface

CONELOG® SCREW-LINE IMPLANT INNER CONFIGURATION

CONELOG® SCREW-LINE Implants are equipped with a cone (7.5°) and three grooves in the inner configuration for positioning CONELOG® Abutments. The CONELOG® Abutments are apical with a cone and three cams, and lock into the conical connection and the three grooves of the implant. The CONELOG® Abutment does not cover the implant shoulder. A CONELOG® Abutment screw is used to fix CONELOG® Abutments in the CONELOG® SCREW-LINE Implant with a defined torque.



Conical CONELOG® Implant abutment connection

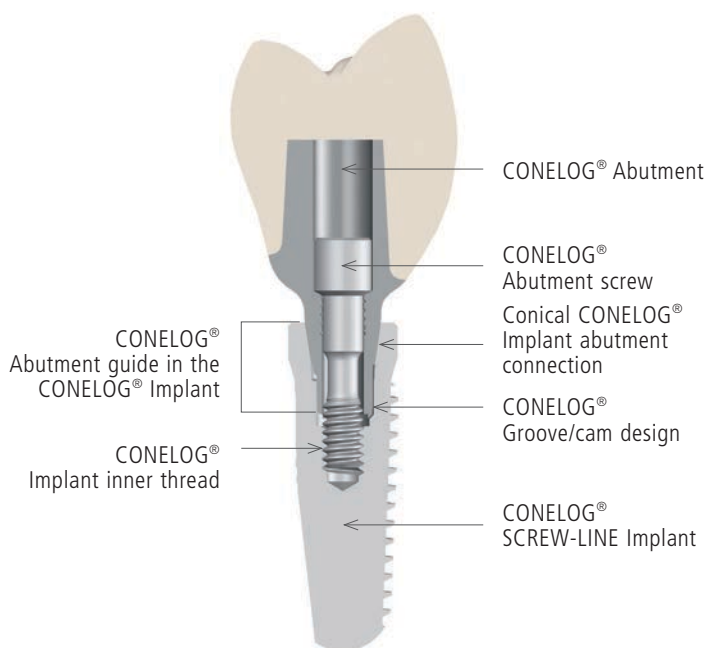

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION


For optimal positioning of the abutments in the implant, they should be aligned in the bone so that one of the three grooves points vestibularly. The drivers include markings on the outside that correspond to the three grooves of the CONELOG® Implant inner configuration.




CONELOG® IMPLANT/BAR ABUTMENT/BALL ABUTMENT CONNECTION

Different CONELOG® Abutments, CONELOG® Bar abutments, CONELOG® Ball abutments, and CONELOG® Locator® Abutments with several geometries for anchoring of implant-retained full prostheses are available for the CONELOG® Implant System. These abutments differ from each other in two different connection types of their apical regions.

CONELOG® Bar, Ball and Locator® Abutments are equipped with a thread in the apical region which engages with the inner thread of the CONELOG® Implant. These abutments are screwed into the CONELOG® Implant using the corresponding drivers at a defined torque.

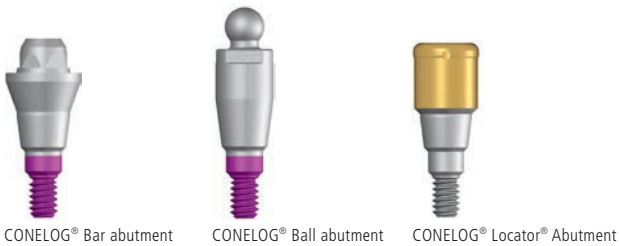


Due to the design of the screw connection, CONELOG® Bar, Ball, and Locator® Abutments have no cams.

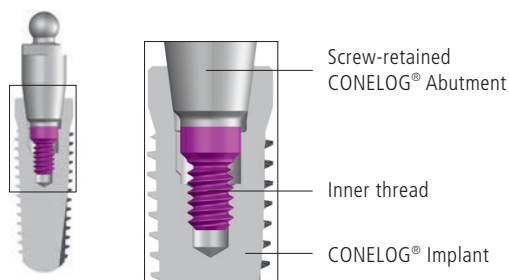


Example: CONELOG® Ball abutment (Ø 4.3 mm) in a CONELOG® SCREW-LINE Implant

PRODUCTION PRECISION

The inner and outer geometry of the CONELOG® Implants and abutments are rotary machined for the most part. The tolerances can therefore be kept very low. The result is excellent part precision without impacting the material structure. The CONELOG® Implant abutment connection ensures a very precise, stable and rotation-resistant connection to the CONELOG® Prosthetic components.



CONELOG® SCREW-LINE Implant



CONELOG® Abutment

CONELOG® COMPONENTS

For the CONELOG® SCREW-LINE Implants, some CONELOG® Components are available such as CONELOG® Cover screws, CONELOG® Healing caps, CONELOG® Impression posts and CONELOG® Prosthetic components.



CONELOG® Cover screw

CONELOG® Healing cap
bottleneck, wide body, cylindrical



CONELOG® Impression post
open and closed tray

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION

CONELOG® PROSTHETIC COMPONENTS

CONELOG® SCREW-LINE Implants can be provided with a pallet of wide-ranging, anatomically appropriate prosthetic components. Esthetic solutions are easily achieved. All CONELOG® Abutments are color-coded by implant diameter.

CONELOG® Temporary abutment


The CONELOG® Temporary abutment (titanium alloy) can be used for immediate implantation or after opening for temporary restoration.



CONELOG® Esthomic® Abutments


The CONELOG® Esthomic® Abutments include an anatomical shoulder and are available in various gingival heights.

- CONELOG® Esthomic® Abutment, straight
- CONELOG® Esthomic® Abutment, 15° and 20° angled, in type A and B
- CONELOG® Esthomic® Abutment, inset

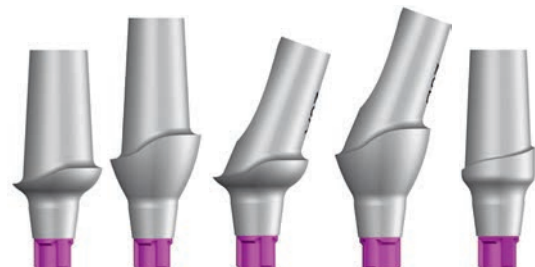

Angled CONELOG® Esthomic® Abutments, type A and B

Angled abutments type A and B are available in the CONELOG® Esthomic® Line of abutments. Type A has a cam opposing the angle direction. In contrast to type A, type B has a 60° offset cam. Both types make six different rotation positions possible to achieve an optimal prosthetic axis alignment.

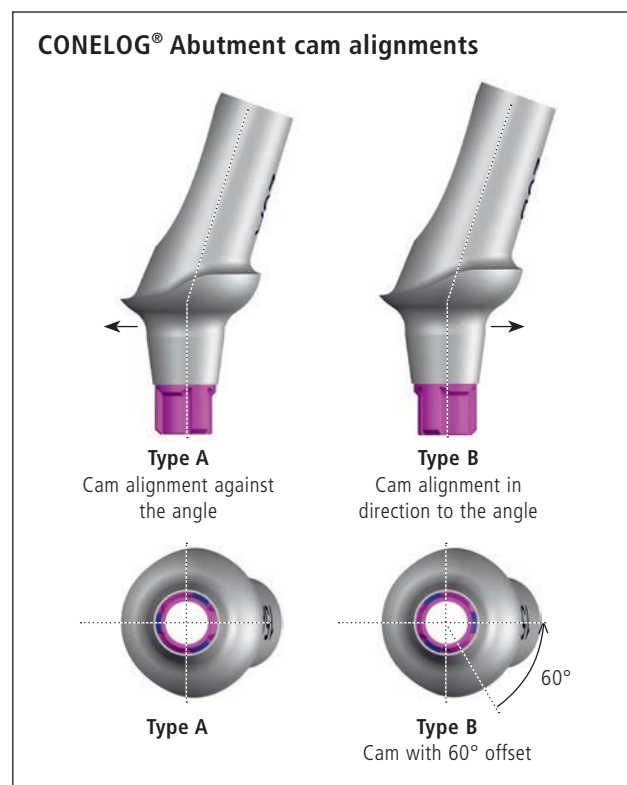

CONELOG® Gold-plastic abutment

The CONELOG® Gold-plastic abutment can be used to fabricate single-crowns, individual implant abutments (mesostructures) for cementable bridge restorations and primary abutments for bridging implant axis divergences in the telescopic crown technique using the cast-on technique.



THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION


CONELOG® Titanium base CAD/CAM

The CONELOG® Titanium base CAD/CAM enables restorations on CONELOG® Implants with individual and highly precise two-piece abutments made from zirconium oxide, titanium or cast alloy. The base is available in the gingival heights 0.8 and 2.0 mm and is used as a bonding base for individual, implant-supported reconstructions such as mesostructures as well as crown, bridge and double-crown restorations.



CONELOG® Logfit® Abutments

The Logfit® Prosthetic System enables the fabrication of cement-retained crown and bridge restorations. The Logfit® Prosthetic System consists of color-coded CONELOG® Logfit® Abutments with two gingival heights (1.0 and 2.5 mm), Logfit® Impression caps, Logfit® Analogs and Logfit® Burn-out plastic copings with and without rotation protection for the manufacture of cast crown and bridge reconstructions.



CONELOG® Vario SR abutments

CONELOG® Vario SR abutments are available in straight, in 20° and 30° angled versions. These abutments can compensate for large implant axis divergences. Prefabricated Vario SR prosthetic components make fabrication of occlusally screw-retained crown, bridge and bar restorations possible. Burn-out plastic copings can be used to fabricate casted crown and bridge restorations. The titanium caps have a retention surface on the outside and are designed for temporary or final bridge restorations made of plastic. Titanium bases for bars are available for laser-welded bar restorations.




IMPORTANT NOTE

Because of the conical inner configuration of the CONELOG® SCREW-LINE Implants, they are only compatible with CONELOG® Components.

CONELOG® Universal and Telescope abutment

The CONELOG® Universal and Telescope abutments can be used for individually fabricated cementable crown and bridge restorations and for telescopic crown restorations. The abutments are made of titanium alloy and can be custom trimmed.



CONELOG® DISCONNECTOR FOR CONELOG® ABUTMENTS

The CONELOG® Disconnecter for CONELOG® Abutments is used to remove or decouple CONELOG® Abutments from the CONELOG® Implants/Lab analogs. If the abutment does not come loose, the torque wrench (locked setting) can be placed on the disconnecter and the abutment can be loosened by turning clockwise.



CONELOG® Bar-, Ball- and Locator® Abutments

For the CONELOG® Implant System, CONELOG® Bar, Ball, and Locator® Abutments are available in different gingival heights for anchoring of implant-retained full prostheses. For CONELOG® Bar abutments, there are several bases available for burn-out, cast-on, soldering, and laser-welding techniques. CONELOG® Bar-, Ball- and Locator® Abutments are perfectly suited for movable anchorings of full prostheses.



CONELOG® Bar, Ball and Locator® Abutment

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION

GENERAL SAFETY INSTRUCTIONS AND WARNINGS

The descriptions in this product catalog are not sufficient to allow immediate use of the CONELOG® Implant System. Instruction by a surgeon experienced in using the CONELOG® Implant System is strongly recommended.

An improper procedure during use of the CONELOG® Products can lead to failures, implant damage, bone loss or unsatisfactory esthetic results. The products may be used only by dentists, surgeons and dental technicians trained in the implant system. Use of these products requires specialized knowledge and experience in implant dentistry. Detailed information on the choice of suitable implants, prosthetic components, treatment planning and application is contained in the user information. Your local representative will be happy to provide you with information.

Consulting and technical advice on the use of our products is provided orally, in writing, by electronic media and/or by demonstration. The provided information represents the current state of science and technology known to us at the point in time that the product is placed on the market. This does not exempt the user from the responsibility to personally test the product for suitability for the intended purpose, indication and procedure. Handling and use of the product take place outside of our control and is the direct responsibility of the user. All liability for damages resulting from such use is waived. ALTATEC GmbH/CAMLOG Biotechnologies AG does not warrant nor provide replacement services when non-system components are used.

The CONELOG® Implant System is part of a comprehensive treatment concept and must be used only with the pertinent original parts and tools according to the suggestions and instructions for use provided by the manufacturer. All components of the CONELOG® Implant System are matched precisely to one another. The use of third party components can affect the function and safety of the system.

Instruments and system components are designed for specific implant and prosthetic lines and implant diameters. Their use with any other implant or prosthetic product lines or a different diameter can lead to the mechanical failure of system components, tissue injury, or esthetically unsatisfactory results. Because of this, some implant and prosthetic product lines have some dedicated components and tools. Pay attention to the color markings when choosing instruments for the required implant diameter.

Products intended for single use must not be reused because safe preparation and/or functional safety cannot be ensured.

Within the bounds of our sales and delivery terms, we guarantee the flawless quality of our products.

Because of the small sizes involved, it may happen that a product is swallowed and/or aspirated. Aspiration can lead to dyspnea and in the worst case to asphyxiation. For this reason, products must be secured in general against aspiration and swallowing during intraoral use.

Where indications are listed for a particular product, it should be noted that any indications that are not listed are in fact contraindicated.

Sterile packaged products must be kept dry, out of direct sunlight and at room temperature. The packaging must be checked before opening for damage and the expiration date and should only be opened immediately before the products are used.

Not all products are available in all countries.

PACKAGING UNITS

If not otherwise specified, the packaging unit is 1 each.

EXPLANATION OF SYMBOLS/CHARACTERS ON LABELS/PRODUCT LABELS AND PACKAGE INSERTS

	Sterilization using irradiation
	Non-sterile
	Caution, consult accompanying documents
	Use by
	Do not reuse
	Article number
	Lot number
	Manufacturer
	Temperature limitation
	Caution: US Federal law restricts this device to sale by or on the order of a dentist or physician.

COLOR-CODING OF THE SURGICAL AND PROSTHETICAL CONELOG® PRODUCTS

	Color	Diameter
	gray	3.3 mm
	yellow	3.8 mm
	red	4.3 mm
	blue	5.0 mm

THE CONELOG® IMPLANT SYSTEM

SYSTEM INFORMATION

Exterior packaging:

Sealed, color-coded, folding carton with product label


Secondary packaging:

Sealed

Implant internal packaging (primary packaging):

Sealed, color-coded

Example product label of exterior implant packaging

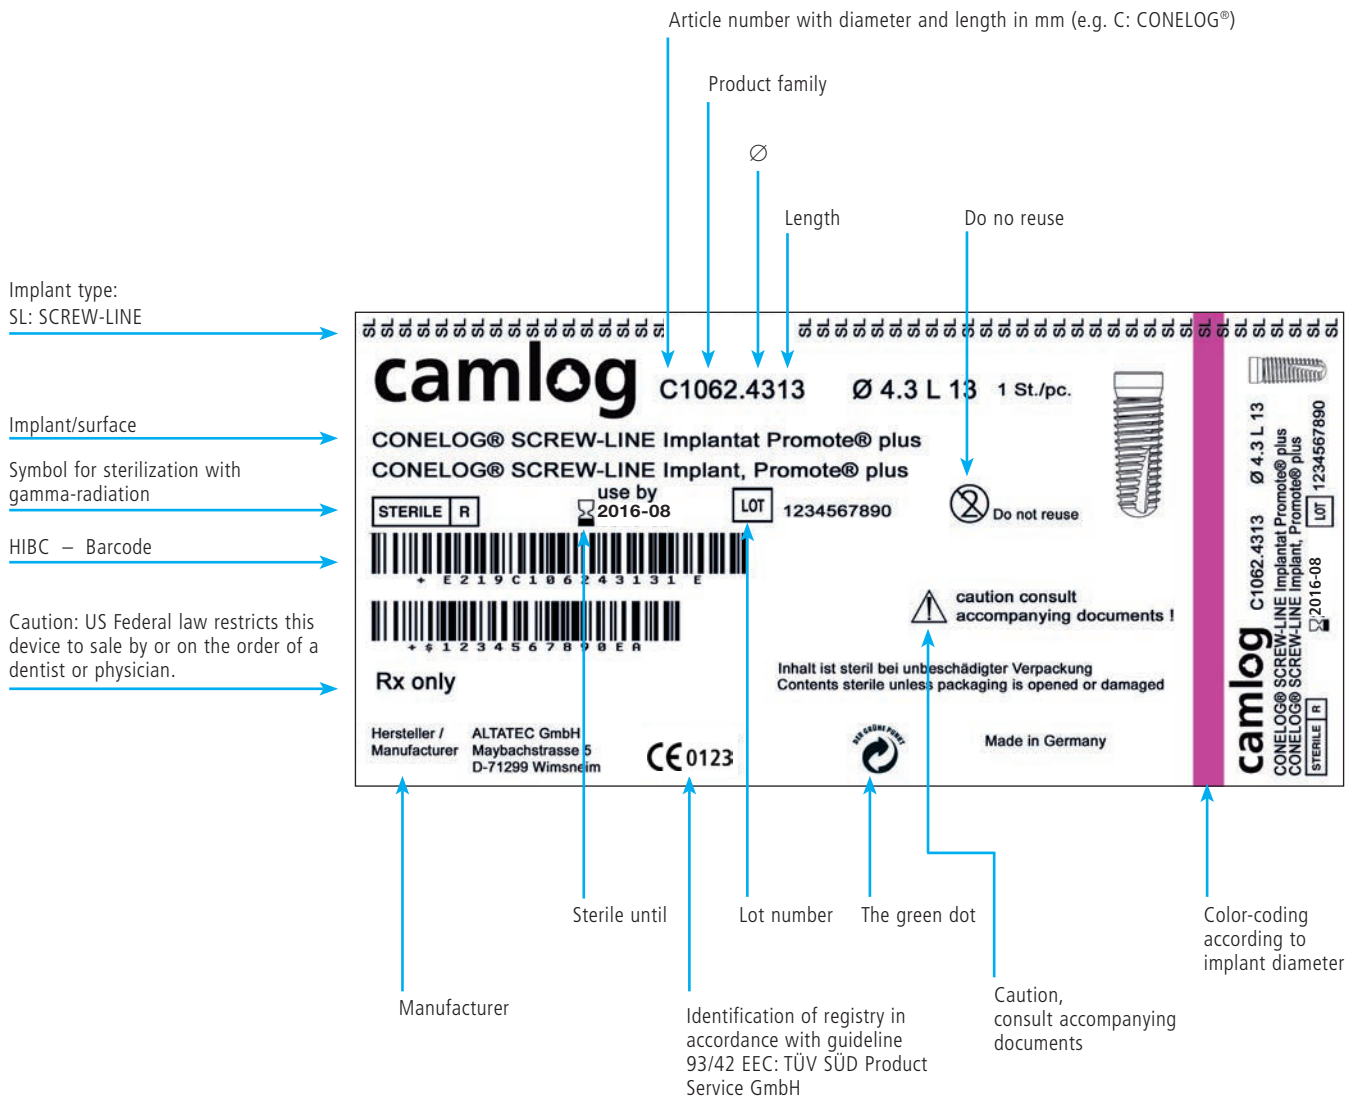

SURGERY	11
PLANNING	12
X-RAY PLANNING FOILS AND TRANSFER PICTURES	12
CT-PLANNING	13
IMPLANT OVERVIEW	14
CONELOG® SCREW-LINE IMPLANTS	15
SURGERY SET CAMLOG®/CONELOG® SCREW-LINE	16
SURGICAL INSTRUMENTS SCREW-LINE	17
OSTEOTOMY SET SCREW-LINE	20
GUIDE SYSTEM	24
CONELOG® HEALING CAPS	30
ALTAPIN SET	31
INSTRUMENTS	32
SURGICAL INSTRUMENTS	32
SURGICAL-PROSTHETIC INSTRUMENTS	34
PROSTHETIC INSTRUMENTS	35

SURGERY


X-RAY PLANNING FOILS / X-RAY TRANSFER PICTURES

Art. No.

Article


Ø
in mm

C5300.9010

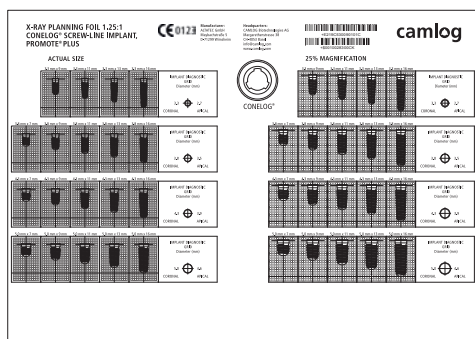


**X-Ray Planning foil 1.25:1,
for CONELOG® SCREW-LINE Implants,
Magnification 25%**

C5300.9011

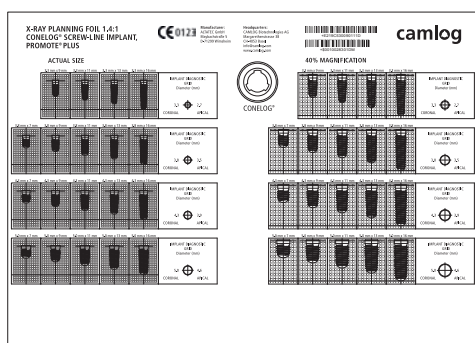

**X-Ray Planning foil 1.4:1,
for CONELOG® SCREW-LINE Implants,
Magnification 40%**

C5300.9080



**X-Ray Transfer pictures 1.25:1,
for CONELOG® SCREW-LINE Implants,
Planning foils, self-adhesive,
Magnification 25%**

3.3

C5300.9081

3.8

C5300.9082

4.3

C5300.9083

5.0

Art. No.		Article	Material
A2002.2000		CT-tube for drill Ø 2.0 mm, corrugated tubing Length 4.0/10.0 mm internal diameter 2.1 mm external diameter 2.5 mm (10 units)	Titanium alloy
A2222.2200		CT-tube for drill Ø 2.2 mm, corrugated tubing Length 4.0/10.0 mm internal diameter 2.3 mm external diameter 2.7 mm (10 units)	Titanium alloy
A2050.2600		Drill for CT-tube (for A2002.2000), Ø 2.6 mm	Stainless steel
A2050.2800		Drill for CT-tube (for A2222.2200), Ø 2.8 mm	Stainless steel


SURGERY

IMPLANT OVERVIEW

CONELOG® SCREW-LINE IMPLANTS, PROMOTE® PLUS


	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm
Length 7 mm		C1062.3807 	C1062.4307 	C1062.5007 
Length 9 mm	C1062.3309 	C1062.3809 	C1062.4309 	C1062.5009 
Length 11 mm	C1062.3311 	C1062.3811 	C1062.4311 	C1062.5011 
Length 13 mm	C1062.3313 	C1062.3813 	C1062.4313 	C1062.5013 
Length 16 mm	C1062.3316 	C1062.3816 	C1062.4316 	C1062.5016 
Ø apical (mean value)	2.7 mm	3.5 mm	3.9 mm	4.6 mm

Note: The implant length is the distance from the apical curve to the occlusal plane surface of the implant.

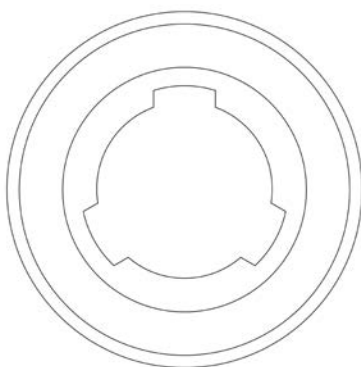

SURGERY

CONELOG® SCREW-LINE IMPLANTS

Art. No.		Article	Ø in mm	Length in mm	Material
C1062.3309		CONELOG® SCREW-LINE Implant, Promote® plus incl. CONELOG® Insertion post and CONELOG® Implant cover screw	3.3	9	Titanium Grade 4
C1062.3311				11	
C1062.3313				13	
C1062.3316				16	
C1062.3807			3.8	7	
C1062.3809				9	
C1062.3811				11	
C1062.3813				13	
C1062.3816				16	
C1062.4307			4.3	7	
C1062.4309				9	
C1062.4311				11	
C1062.4313				13	
C1062.4316				16	
C1062.5007			5.0	7	
C1062.5009				9	
C1062.5011				11	
C1062.5013				13	
C1062.5016				16	

All CONELOG® Implants are packed sterile.

Surface: Promote®

Important notes

- Preparation of the implant bed for CONELOG® SCREW-LINE Implants and for CAMLOG® SCREW-LINE Implants is identical.
- CONELOG® SCREW-LINE Implants can only be supplied with CONELOG® Prosthetic components.

SURGERY

SURGERY SET CAMLOG®/CONELOG® SCREW-LINE

Art. No.

Article

J5300.0057

Surgery Set CAMLOG®/CONELOG® SCREW-LINE

contains all necessary color-code ordered
surgical instruments, incl. torque wrench and
holding key for insertion post



Note: The preparation of the implant bed for CAMLOG® SCREW-LINE Implants and for CONELOG® SCREW-LINE Implants is identical.

SURGERY

SURGICAL INSTRUMENTS SCREW-LINE

Art. No.		Article	Ø in mm	Length in mm	Material
J5050.2300*		Round bur resterilizable	2.3	—	Stainless steel
J5050.3500		Round bur resterilizable	3.5	—	Stainless steel
J5051.2003		Pilot drill without coil, resterilizable	2.0	—	Stainless steel
J5051.2000*		Pilot drill SCREW-LINE reduced coil, resterilizable	2.0	—	Stainless steel
J5051.2800*		Pre-drill SCREW-LINE resterilizable	1.7-2.8	—	Stainless steel
J5015.0007*		Depth stop SCREW-LINE for pilot drill (J5051.2000) and pre-drill (J5051.2800) with reduced coil, resterilizable	—	7	Stainless steel
J5015.0009*			—	9	Stainless steel
J5015.0011*			—	11	Stainless steel
J5015.0013*			—	13	Stainless steel

* The instruments listed above are also included in the surgery set CAMLOG®/CONELOG® SCREW-LINE.

SURGERY

SURGICAL INSTRUMENTS SCREW-LINE

Art. No.		Article	Ø in mm	Length in mm	Material
J5052.3309 J5052.3311 J5052.3313 J5052.3316		Form drill SCREW-LINE, with reduced coil, resterilizable	3.3	9 11 13 16	Stainless steel
J5052.3807 J5052.3809 J5052.3811 J5052.3813 J5052.3816			3.8	7 9 11 13 16	
J5052.4307 J5052.4309 J5052.4311 J5052.4313 J5052.4316			4.3	7 9 11 13 16	
J5052.5007 J5052.5009 J5052.5011 J5052.5013 J5052.5016			5.0	7 9 11 13 16	
J5015.3300		Depth stop for form drills SCREW-LINE, with reduced coil, resterilizable	3.3	—	Titanium alloy
J5015.3800			3.8	—	
J5015.4300			4.3	—	
J5015.5000			5.0	—	

The instruments listed above are also included in the surgery set CAMLOG®/CONELOG® SCREW-LINE.

SURGERY

SURGICAL INSTRUMENTS SCREW-LINE

Art. No.		Article	Ø in mm	Length in mm	Material
J5053.3316		Form drill SCREW-LINE, Cortical bone, resterilizable	3.3	—	Stainless steel
J5053.3816			3.8	—	
J5053.4316			4.3	—	
J5053.5016			5.0	—	
J5054.3309		Tap SCREW-LINE, with hexagon, resterilizable	3.3	—	Stainless steel
J5054.3809			3.8	—	
J5054.4309			4.3	—	
J5054.5009			5.0	—	

The instruments listed above are also included in the surgery set CAMLOG®/CONELOG® SCREW-LINE.

SURGERY

OSTEOTOMY SET SCREW-LINE

Art. No.	Article	Ø in mm	Material
----------	---------	------------	----------

J5418.0020



Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE, straight convex

Content:

J5417.2800 Pre-Osteotome SCREW-LINE, straight convex	1.7-2.8
J5418.3300 Osteotome SCREW-LINE, straight convex	3.3
J5418.3800 Osteotome SCREW-LINE, straight convex	3.8
J5418.4300 Osteotome SCREW-LINE, straight convex	4.3
J5418.5000 Osteotome SCREW-LINE, straight convex	5.0
J5418.6000 Osteotome SCREW-LINE, straight convex	6.0*

* for CAMLOG® SCREW-LINE Implant Ø 6.0 mm only.

J5417.2800



Pre-Osteotome SCREW-LINE straight convex

1.7-2.8 Stainless steel

J5418.3300



Osteotome SCREW-LINE straight convex

3.3 Stainless steel

J5418.3800



3.8

J5418.4300



4.3

J5418.5000



5.0

SURGERY

OSTEOTOMY SET SCREW-LINE

Art. No.

Article

Ø
in mm

Material

J5418.0030



Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE, angled convex

Content:

J5417.2800 Pre-Osteotome SCREW-LINE, straight convex	1.7-2.8
J5418.3310 Osteotome SCREW-LINE, angled convex	3.3
J5418.3810 Osteotome SCREW-LINE, angled convex	3.8
J5418.4310 Osteotome SCREW-LINE, angled convex	4.3
J5418.5010 Osteotome SCREW-LINE, angled convex	5.0
J5418.6010 Osteotome SCREW-LINE, angled convex	6.0*

* for CAMLOG® SCREW-LINE Implant Ø 6.0 mm only.

J5417.2800



Pre-Osteotome SCREW-LINE
straight convex

1.7-2.8 Stainless steel

J5418.3310



Osteotome SCREW-LINE
angled convex

3.3 Stainless steel

J5418.3810



3.8

J5418.4310



4.3

J5418.5010



5.0



SURGERY

OSTEOTOMY SET SCREW-LINE

Art. No.	Article	Ø in mm	Material
----------	---------	------------	----------

J5420.0020



Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE, straight concave

- Content:
- J5419.2800 Pre-Osteotome SCREW-LINE, straight concave 1.7-2.8
 - J5420.3300 Osteotome SCREW-LINE, straight concave 3.3
 - J5420.3800 Osteotome SCREW-LINE, straight concave 3.8
 - J5420.4300 Osteotome SCREW-LINE, straight concave 4.3
 - J5420.5000 Osteotome SCREW-LINE, straight concave 5.0
 - J5420.6000 Osteotome SCREW-LINE, straight concave 6.0*
- * for CAMLOG® SCREW-LINE Implant Ø 6.0 mm only.

J5419.2800		Pre-Osteotome SCREW-LINE straight concave	1.7-2.8	Stainless steel
J5420.3300			3.3	Stainless steel
J5420.3800			3.8	
J5420.4300			4.3	
J5420.5000			5.0	

SURGERY

OSTEOTOMY SET SCREW-LINE

Art. No.	Article	Ø in mm	Material
----------	---------	------------	----------

J5420.0030



Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE, angled concave

Content:

J5419.2800 Pre-Osteotome SCREW-LINE, straight concave	1.7-2.8
J5420.3310 Osteotome SCREW-LINE, angled concave	3.3
J5420.3810 Osteotome SCREW-LINE, angled concave	3.8
J5420.4310 Osteotome SCREW-LINE, angled concave	4.3
J5420.5010 Osteotome SCREW-LINE, angled concave	5.0
J5420.6010 Osteotome SCREW-LINE, angled concave	6.0*

* for CAMLOG® SCREW-LINE Implant Ø 6.0 mm only.

J5419.2800



Pre-Osteotome SCREW-LINE
straight concave

1.7-2.8 Stainless steel

J5420.3310



Osteotome SCREW-LINE
angled concave

3.3 Stainless steel

J5420.3810



3.8

J5420.4310



4.3

J5420.5010



5.0



SURGERY

GUIDE SYSTEM

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.	Article	Ø in mm	Length in mm	Material
Guide System Implants				
C1063.3309		Guide System CONELOG® SCREW-LINE Implant, Promote® plus, incl. Guide System CONELOG® Insertion post and CONELOG® Cover screw		Titanium Grade 4
C1063.3311				
C1063.3313				
C1063.3316				
C1063.3807				
C1063.3809				
C1063.3811				
C1063.3813				
C1063.3816				
C1063.4307				
C1063.4309				
C1063.4311				
C1063.4313				
C1063.4316				

All CONELOG® Implants are packaged sterile.

Surface: Promote®

Guide System Pilot Drills

J5043.3309		Guide System Pilot drill set, for Ø 3.3 mm, internal irrigation, sterile, Content: Guide System pilot drills Ø 2.0 mm, length 5 and 9 mm	3.3	9	Stainless steel
J5043.3311					
J5043.3313					
J5044.3316					
J5043.4307		Guide System Pilot drill set, for Ø 3.8/4.3 mm, internal irrigation, sterile, Content: Guide System pilot drills Ø 2.0 mm, length 5 and 7 mm	3.8	7	
J5043.4309			4.3		
J5043.4309		Guide System Pilot drill set, for Ø 3.8/4.3 mm, internal irrigation, sterile, Content: Guide System pilot drills Ø 2.0 mm, length 5 and 9 mm	3.8	9	
J5043.4309			4.3		

Note: All Guide System drills and gingiva punches are intended for single use only!

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.	Article	Ø in mm	Length in mm	Material
Guide System Pilot Drills				
J5043.4311	 Guide System Pilot drill set, for Ø 3.8/4.3 mm , internal irrigation, sterile, Content: Guide System pilot drills Ø 2.0 mm, length 5, 9 and 11 mm	3.8 4.3	11	Stainless steel
J5043.4313	 Guide System Pilot drill set, for Ø 3.8/4.3 mm , internal irrigation, sterile, Content: Guide System pilot drills Ø 2.0 mm, length 5, 9, 11 and 13 mm	3.8 4.3	13	
J5044.4316	 Guide System Pilot drill for Ø 3.8/4.3 mm , internal irrigation, sterile, Ø 2.0 mm, length 16 mm	3.8 4.3	16	

Guide System Surgery Sets and Form Drills

J5045.3309	 Guide System Surgery set, SCREW-LINE, Ø 3.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.3 mm, length 5 mm and Guide System form drill Ø 3.3 mm, length 9 mm	3.3	9	Stainless steel
J5045.3311	 Guide System Surgery set, SCREW-LINE, Ø 3.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.3 mm, length 5 mm and Guide System form drills Ø 3.3 mm, length 9 and 11 mm	3.3	11	
J5045.3313	 Guide System Surgery set, SCREW-LINE, Ø 3.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.3 mm, length 5 mm and Guide System form drills Ø 3.3 mm, length 9, 11 and 13 mm	3.3	13	
J5046.3316	 Guide System Form drill, SCREW-LINE, Ø 3.3 mm , internal irrigation, sterile, Ø 3.3 mm, length 16 mm	3.3	16	

Note: All Guide System drills and gingiva punches are intended for single use only!

SURGERY

GUIDE SYSTEM

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.		Article	Ø in mm	Length in mm	Material
Guide System Surgery Sets and Form Drills					
J5045.3807		Guide System Surgery set, SCREW-LINE, Ø 3.8 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.8 mm, length 5 mm and Guide System form drills Ø 3.8 mm, length 7 mm	3.8	7	Stainless steel
J5045.3809		Guide System Surgery set, SCREW-LINE, Ø 3.8 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.8 mm, length 5 mm and Guide System form drills Ø 3.8 mm, length 9 mm	3.8	9	
J5045.3811		Guide System Surgery set, SCREW-LINE, Ø 3.8 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.8 mm, length 5 mm and Guide System form drills Ø 3.8 mm, length 9 and 11 mm	3.8	11	
J5045.3813		Guide System Surgery set, SCREW-LINE, Ø 3.8 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 3.8 mm, length 5 mm and Guide System form drills Ø 3.8 mm, length 9, 11 and 13 mm	3.8	13	
J5046.3816		Guide System Form drill, SCREW-LINE, Ø 3.8 mm , internal irrigation, sterile, Ø 3.8 mm, length 16 mm	3.8	16	
J5045.4307		Guide System Surgery set, SCREW-LINE, Ø 4.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 4.3 mm, length 5 mm and Guide System form drills Ø 4.3 mm, length 7 mm	4.3	7	
J5045.4309		Guide System Surgery set, SCREW-LINE, Ø 4.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 4.3 mm, length 5 mm and Guide System form drills Ø 4.3 mm, length 9 mm	4.3	9	
J5045.4311		Guide System Surgery set, SCREW-LINE, Ø 4.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 4.3 mm, length 5 mm and Guide System form drills Ø 4.3 mm, length 9 and 11 mm	4.3	11	
J5045.4313		Guide System Surgery set, SCREW-LINE, Ø 4.3 mm , internal irrigation, sterile, Content: Guide System pre-drill Ø 4.3 mm, length 5 mm and Guide System form drills Ø 4.3 mm, length 9, 11 and 13 mm	4.3	13	
J5046.4316		Guide System Form drill, SCREW-LINE, Ø 4.3 mm , internal irrigation, sterile, Ø 4.3 mm, length 16 mm	4.3	16	

Note: All Guide System drills and gingiva punches are intended for single use only!

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.	Article	Ø in mm	Length in mm	Material
Guide System Form Drills Cortical Bone				
J5048.3309	 L9	3.3	9	Stainless steel
J5048.3311	 L11		11	
J5048.3313	 L13		13	
J5048.3316	 L16		16	
J5048.3807	 L7	3.8	7	
J5048.3809	 L9	3.8	9	
J5048.3811	 L11	3.8	11	
J5048.3813	 L13	3.8	13	
J5048.3816	 L16	3.8	16	
J5048.4307	 L7	4.3	7	
J5048.4309	 L9	4.3	9	
J5048.4311	 L11	4.3	11	
J5048.4313	 L13	4.3	13	
J5048.4316	 L16	4.3	16	

Note: All Guide System drills and gingiva punches are intended for single use only!

SURGERY

GUIDE SYSTEM

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.	Article	Ø in mm	Length in mm	Material
Guide System Gingiva Punches, sterile				
J5041.3300		3.3	Stainless steel	
J5041.3800		3.8		
J5041.4300		4.3		
Guide System Guiding sleeves, height 3.0 mm (2 units)				
J3714.3303		3.3	Titanium alloy	
J3714.3803		3.8		
J3714.4303		4.3		
Guide System Insertion Posts				
C2026.3300		3.3	Titanium alloy	
C2026.3800				
C2026.4300				

**Guide System CONELOG®,
Insertion posts,
for CONELOG® Lab analogs,
incl. fixing screw
(2 units)**

Note: All Guide System drills and gingiva punches are intended for single use only!

TEMPLATE-GUIDED IMPLANT BED PREPARATION AND IMPLANTATION

Art. No.	Article	Ø in mm	Length in mm	Material
Guide System Instruments				
J3713.3300	 Guide System Template drill, for Guide System Guiding sleeve	3.3		Stainless steel
J3713.4300		3.8		
		4.3		
J3716.3300	 Guide System Seating tool, for Guide System Guiding sleeve	3.3		Stainless steel
J3716.4300		3.8		
		4.3		
J5301.3300	 Guide System Check-up pin, for Guide System Guiding sleeve	3.3		Stainless steel
J5301.4300		3.8		
		4.3		
J5303.4300	 Guide System Driver, for Guide System Implant Ø 3.3/3.8/4.3 mm, manual/wrench	3.3		Stainless steel
		3.8		
		4.3		
J5304.4300	 Guide System Driver, for Guide System Implant Ø 3.3/3.8/4.3 mm, with ISO shaft for angled hand piece	3.3		
		3.8		
		4.3		

SURGERY

CONELOG® HEALING CAPS

CONELOG® Healing cap, cylindrical, titanium alloy, sterile

GH 		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
	GH 2.0	C2015.3320	C2015.3820	C2015.4320	C2015.5020	
	GH 4.0	C2015.3340	C2015.3840	C2015.4340	C2015.5040	
	GH 6.0		C2015.3860*	C2015.4360*	C2015.5060*	

* Suitable for bite registration.

CONELOG® Healing cap, wide body, titanium alloy, sterile

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
	GH 4.0	C2014.3340	C2014.3840	C2014.4340	C2014.5040	
	GH 6.0		C2014.3860	C2014.4360	C2014.5060	

CONELOG® Healing cap, bottleneck, titanium alloy, sterile

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
	GH 4.0	C2011.3340	C2011.3840	C2011.4340	C2011.5040	
	GH 6.0		C2011.3860	C2011.4360	C2011.5060	

Ø = implant diameter, GH = gingiva height in mm

SURGERY

ALTAPIN SET

Art. No.	Article	Material
M5600.0110	ALTApin set Membrane fixation system, resterilizable Content: M5100.0010 ALTApin applicator, straight M5100.0050 ALTApin pricker (holder) M5100.0070 ALTApin membrane fixator M5200.0055 ALTApin pricker, insert (2 units) M1000.0050 ALTApin magazine, 7 titanium pins (4 units)	Plastic/ Titanium alloy/ Stainless steel
M5600.0210	ALTApin tray (without content)	Plastic
M5100.0010	ALTApin applicator, straight incl. activator	Stainless steel
M5100.0030	ALTApin applicator, angled 90° incl. activator	Stainless steel
M5200.0010	ALTApin applicator, straight, work element incl. activator	Stainless steel
M5100.0050	ALTApin pricker	Stainless steel
M5100.0070	ALTApin membrane fixator	Stainless steel
M5100.0100	ALTApin surgery mallet	Stainless steel
M5500.0050	ALTApin single patient drill, ISO shaft	Stainless steel
M5200.0055	ALTApin pricker, insert	Stainless steel
M1000.0050	ALTApin magazine 7 titanium pins, sterile (1 unit)	Titanium alloy
M1000.0100	ALTApin magazine 7 titanium pins, sterile (3 units)	Titanium alloy

SURGERY

SURGICAL INSTRUMENTS

Art. No.		Article	Dimensions in mm	Material
J5300.2028		Paralleling pin SCREW-LINE, with depth marks	Ø 1.7-2.8/ 2.0	Titanium alloy
J5002.0005		Drill extension ISO shaft	26.6	Stainless steel
J5322.0010		Tap adapter, short for tap SCREW-LINE	18.0	Stainless steel
J5322.0011		Tap adapter, long for tap SCREW-LINE	23.0	Stainless steel
J5300.0007		Driver for screw implants with ISO shaft for angled hand piece	27.5	Stainless steel
J5300.0008		Driver, short for screw implants, manual/wrench, with borehole for screwdriver, hex, long	18.0	Stainless steel
J5300.0009		Driver, long for screw implants, manual/wrench	27.0	Stainless steel


SURGERY

SURGICAL INSTRUMENTS

Art. No.		Article	Dimensions in mm	Material
J5300.0010		Cardanic driver (30°) for screw implants, adjustable length	–	Stainless steel
J5300.0030		PickUp instrument holder for carrying implants	–	Stainless steel
J5002.0010		Adapter ISO shaft for angled hand piece	21.0	Stainless steel
J5302.0010		Holding key for insertion post	–	Stainless steel
C5302.3310		Adapter for screw implants, long, for CONELOG® SCREW-LINE Implants	3.3	Stainless steel
C5302.4310			3.8	
C5302.4310			4.3	
J5302.3300		Holding sleeve for screw implants color-coded	3.3	Titanium alloy
J5302.3800			3.8	
J5302.4300			4.3	
J5002.0012		Cleaning needle for drills with internal irrigation		Stainless steel
J5002.0020		Cleaning cannula for drills with internal irrigation		Stainless steel

SURGERY

SURGICAL-PROSTHETIC INSTRUMENTS

Art. No.		Article	Length in mm	Material
J5330.8600		Prosthetic set Content: J5320.1030 Torque wrench Screwdriver: J5316.0501 hex, short, manual/wrench J5316.0502 hex, long, manual/wrench J5316.0503 hex, long, ISO shaft J5316.0504 hex, short, ISO shaft		Plastic/ Stainless steel
J5330.8500		Prosthetic tray (without content)		Plastic
J5316.0510		Screwdriver hex, extra short, manual/wrench	14.5	Stainless steel
J5316.0501		Screwdriver hex, short, manual/wrench	22.5	Stainless steel
J5316.0502		Screwdriver hex, long, manual/wrench	30.3	Stainless steel
J5316.0504		Screwdriver hex, short, ISO shaft	18.0	Stainless steel
J5316.0503		Screwdriver hex, long, ISO shaft	26.0	Stainless steel
J5320.1030		Torque wrench with continuous torque adjustment until maximal 30 Ncm	—	Stainless steel
C5300.1601		CONELOG® Disconnecter for CONELOG® Abutments Ø 3.3/3.8/4.3 mm Thread M 1.6		Stainless steel
C5300.2001		CONELOG® Disconnecter for CONELOG® Abutments Ø 5.0 mm Thread M 2.0		Stainless steel

SURGERY

PROSTHETIC INSTRUMENTS

Art. No.		Article	Length in mm	Material
J5300.0011		Driver for ball abutment, manual/wrench	18.3	Stainless steel
J5315.0005		Screwdriver Activator, for ball abutment matrix CM Dalbo®-Plus	—	Stainless steel
C5300.0020		Driver for CONELOG® Bar abutment	18.6	Stainless steel
C5300.0027		Driver for impression post and healing caps for CONELOG® Bar abutment	19.1	Stainless steel
J2253.0001		Driver for Locator®, manual/wrench	24.3	Stainless steel
J2253.0002		Locator® Instrument threepart	83.0	Stainless steel
				
J2253.0003		Locator® Angle measurement guide	—	Stainless steel
J2253.0004		Locator® Parallel post (4 units)	—	Nylon

CONELOG® PROSTHETICS	37
PROSTHETICS OVERVIEW	38
TORQUE WRENCH SETTINGS	42
IMPRESSION TAKING, BITE REGISTRATION, FABRICATION OF THE PLASTER MODEL	44
IMPRESSION TAKING, OPEN/CLOSED TRAY	44
BITE REGISTRATION	44
FABRICATION OF THE PLASTER MODEL	45
CROWN AND BRIDGE RESTORATIONS	45
CONELOG® TEMPORARY ABUTMENT	45
CONELOG® ESTHOMIC® ABUTMENTS	45
CONELOG® UNIVERSAL ABUTMENT	47
CONELOG® GOLD-PLASTIC ABUTMENT	47
CONELOG® LOGFIT® ABUTMENTS	47
ACCESSORIES FOR CONELOG® ABUTMENTS	48
CROWN, BRIDGE AND HYBRID RESTORATIONS	49
CONELOG® TITANIUM BASES CAD/CAM	49
ACCESSORIES FOR CAD/CAM PROSTHETICS	50
CONELOG® VARIO SR ABUTMENTS	51
ACCESSORIES FOR VARIO SR	53
HYBRID RESTORATIONS	54
CONELOG® BAR ABUTMENTS	54
CONELOG® BALL ABUTMENTS	56
CONELOG® LOCATOR® ABUTMENTS	58
CONELOG® UNIVERSAL ABUTMENT	61
CONELOG® TELESCOPE ABUTMENT	61
ACCESSORIES FOR CONELOG® ABUTMENTS	61
INSTRUMENTS FOR DENTAL TECHNICIANS	62
CONELOG® SELECTION ABUTMENTS	63

CONELOG® PROSTHETICS

PROSTHETICS OVERVIEW

PROSTHETICS

			∅ 3.3 mm	∅ 3.8 mm	∅ 4.3 mm	∅ 5.0 mm
IMPLANT IMPRESSION TAKING	CONELOG® Impression post, open tray					
			C2121.3300	C2121.3800	C2121.4300	C2121.5000
	CONELOG® Impression post, closed tray					
			C2110.3300	C2110.3800	C2110.4300	C2110.5000
	Impression cap for impression post, closed tray					
			J2111.3300	J2111.3800	J2111.4300	J2111.5000
	CONELOG® Bite registration posts					
			C2140.3300	C2140.3800	C2140.4300	C2140.5000
FABRICATION OF THE PLASTER MODEL	CONELOG® Lab analogs					
			C3010.3300	C3010.3800	C3010.4300	C3010.5000
CONELOG® ABUTMENTS FOR CROWN AND BRIDGE RESTORATIONS	CONELOG® Temporary abutments, titanium alloy					
			C2239.3300	C2239.3800	C2239.4300	C2239.5000
	CONELOG® Esthomic® Abutments, straight					
		GH 1.5 - 2.5	–	C2226.3815	C2226.4315	C2226.5015
		3.0 - 4.5	–	C2226.3830	C2226.4330	C2226.5030
	CONELOG® Esthomic® Abutments, 15° angled, type A					
		GH 1.5 - 2.5	–	C2227.3815	C2227.4315	C2227.5015
		3.0 - 4.5	–	C2227.3830	C2227.4330	C2227.5030
	CONELOG® Esthomic® Abutments, 15° angled, type B					
		GH 1.5 - 2.5	–	C2228.3815	C2228.4315	C2228.5015
		3.0 - 4.5	–	C2228.3830	C2228.4330	C2228.5030

GH = gingiva height

CONELOG® PROSTHETICS

PROSTHETICS OVERVIEW

			Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm
CONELOG® Esthomic® Abutments, 20° angled, type A						
						
GH						
1.5 - 2.5			—	C2231.3815	C2231.4315	C2231.5015
3.0 - 4.5			—	C2231.3830	C2231.4330	C2231.5030
CONELOG® Esthomic® Abutments, 20° angled, type B						
						
GH						
1.5 - 2.5			—	C2232.3815	C2232.4315	C2232.5015
3.0 - 4.5			—	C2232.3830	C2232.4330	C2232.5030
CONELOG® Esthomic® Abutments, Inset						
						
GH						
2.0 - 3.3			C2235.3320	C2235.3820	C2235.4320	C2235.5020
CONELOG® Universal abutments						
						
			C2211.3300	C2211.3800	C2211.4300	C2211.5000
CONELOG® Gold-plastic abutments						
						
			C2246.3300	C2246.3800	C2246.4300	C2246.5000
CONELOG® Logfit® Abutments						
						
GH 1.0			—	C2550.3810	C2550.4310	C2550.5010
GH 2.5			—	C2550.3825	C2550.4325	C2550.5025
CONELOG® Telescope abutments, for double crown restorations						
						
			—	C2212.3800	C2212.4300	C2212.5000
CONELOG® Titanium bases CAD/CAM FOR CROWNS, BRIDGES AND HYBRID RESTORATIONS						
						
GH 0.8			C2244.3308	C2244.3808	C2244.4308	C2244.5008
GH 2.0			C2244.3320	C2244.3820	C2244.4320	C2244.5020
CONELOG® Titanium bases CAD/CAM						
						
GH 0.8			C2242.3308*	C2242.3808*	C2242.4308*	C2242.5008*
GH 2.0			C2242.3320*	C2242.3820*	C2242.4320*	C2242.5020*

GH = gingiva height

* Note: Article numbers will be changed from C2244. to C2242. as of September 2014

CONELOG® PROSTHETICS

PROSTHETICS OVERVIEW

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm
CONELOG® VARIO SR ABUTMENTS FOR CROWNS, BRIDGES AND HYBRID RESTORATIONS OCCLUSALLY SCREW-RETAINED	CONELOG® Vario SR Abutments, straight				
	 GH 1.0	—	C2560.3808	C2560.4308	C2560.5008
	CONELOG® Vario SR Abutments, 20° angled				
	 GH 3.5 - 1.9	—	C2561.3800	C2561.4300	—
	4.0 - 1.8	—	—	—	C2561.5000
	CONELOG® Vario SR Abutments, 30° angled				
	 GH 3.5 - 1.1	—	C2562.3800	C2562.4300	—
	4.5 - 1.3	—	—	—	C2562.5000
	Vario SR Impression caps, closed tray (without rotation securing device)				
		—	J2565.4300		J2565.6000
	Vario SR Impression caps, open tray (without rotation securing device)				
		—	J2566.4300		J2566.6000
	Vario SR analog				
		—	J2567.4300		J2567.6000

GH = gingiva height

CONELOG® PROSTHETICS

PROSTHETICS OVERVIEW

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm
CONELOG® ABUTMENTS FOR HYBRID RESTORATIONS	CONELOG® Bar abutments  GH 1.0 GH 2.5 GH 4.0	C2255.3310 C2255.3325 –	C2255.3810 C2255.3825 C2255.3840	C2255.4310 C2255.4325 C2255.4340	C2255.5010 C2255.5025 C2255.5040
	CONELOG® Ball abutment sets, incl. male part and matrix CM Dalbo®-Plus, red duplication aid/spacer, stabilizing ring and ball abutment analog  GH 1.5 GH 3.0 GH 4.5	C2250.3315 C2250.3330 –	C2250.3815 C2250.3830 C2250.3845	C2250.4315 C2250.4330 C2250.4345	C2250.5015 C2250.5030 C2250.5045
	CONELOG® Ball abutments, male part  GH 1.5 GH 3.0 GH 4.5	C2249.3315 C2249.3330 –	C2249.3815 C2249.3830 C2249.3845	C2249.4315 C2249.4330 C2249.4345	C2249.5015 C2249.5030 C2249.5045
	CONELOG® Locator® Abutments  GH 1.0 GH 2.0 GH 3.0 GH 4.0 GH 5.0	C2253.3310 C2253.3320 C2253.3330 C2253.3340 –	C2253.3810 C2253.3820 C2253.3830 C2253.3840 C2253.3850	C2253.4310 C2253.4320 C2253.4330 C2253.4340 C2253.4350	C2253.5010 C2253.5020 C2253.5030 C2253.5040 C2253.5050
CAD/CAM PROSTHETICS	CONELOG® Scanbodies 	C2600.3310	C2600.4310		C2600.5010
	CONELOG® ScanPosts 	C2620.3306	C2620.3806	C2620.4306	C2620.5006

GH = gingiva height

CONELOG® PROSTHETICS

TORQUE WRENCH SETTINGS

FOR FINAL FIXATION OF SURGICAL COMPONENTS AND SUPRASTRUCTURES

Article



CONELOG® Implant cover screws



CONELOG® Healing caps

cylindrical
wide body
bottleneck



Vario SR protection caps



CONELOG® Lab screws

C4006.1601
C4016.1601*
($\varnothing$ 3.3/3.8/4.3 mm)



C4006.2001
C4016.2001*
($\varnothing$ 5.0 mm)



CONELOG® Vario SR lab screws

C4008.1600
($\varnothing$ 3.8/4.3 mm)



C4008.2000
($\varnothing$ 5.0 mm)



* available from fall 2014

CONELOG®

Temporary abutments
(Optional: Torque after
finished healing phase
20 Ncm)



CONELOG® Abutment screws

C4005.1601
($\varnothing$ 3.3/3.8/4.3 mm)



C4005.2001
($\varnothing$ 5.0 mm)



C4015.1601**
($\varnothing$ 3.3/3.8/4.3 mm)



C4015.2001**
($\varnothing$ 5.0 mm)



CONELOG® Vario SR abutment screws

C4007.1600
($\varnothing$ 3.8/4.3 mm)



C4007.2000
($\varnothing$ 5.0 mm)



** available from September 2014

CONELOG® Esthomic® Abutments, straight



CONELOG® Esthomic® Abutments, angled 15°/20°, type A and B

CONELOG® Esthomic® Abutments, inset

CONELOG® Gold-plastic abutments

CONELOG® Universal abutments

CONELOG® Telescope abutment



CONELOG® Logfit® Abutments

CONELOG® Titanium bases CAD/CAM

(from left to right)



CONELOG® Vario SR abutments straight, 20°/30° angled



Vario SR prosthetic screw

J4005.2004
($\varnothing$ 3.8/4.3/5.0 mm)



Vario SR

plastic copings/titanium
caps/bases for bar



Torque

tightened by hand



20 Ncm

15 Ncm

All screws have to be tightened after at least 5 minutes with the corresponding torque!

CONELOG® PROSTHETICS

TORQUE WRENCH SETTINGS

FOR FINAL FIXATION OF SURGICAL COMPONENTS AND SUPRASTRUCTURES


Article		 J5320.1030	
		Torque	Ø in mm
CONELOG® Bar abutments		C5300.0020 (Ø 3.3/3.8/4.3/5.0 mm) 	20 Ncm 3.3
			30 Ncm 3.8 4.3 5.0
Healing caps for bar abutments		C5300.0027 (Ø 3.3/3.8/4.3/5.0 mm) 	tightened by hand
Prosthetic screw	J4005.1602 (Ø 3.3/3.8/4.3/5.0 mm) 	 J5316.0510 (hex, extra short) J5316.0501 (hex, short) J5316.0502 (hex, long)	15 Ncm
Bases for bar abutments Titanium bonding base for bar abutments			
CONELOG® Ball abutments		J5300.0011 	20 Ncm 3.3 30 Ncm 3.8 4.3 5.0
CONELOG® Locator® Abutments		J2253.0001 	20 Ncm 3.3 30 Ncm 3.8 4.3 5.0
CONELOG® Scanbodies		 J5316.0501 (hex, short) J5316.0502 (hex, long)	tightened by hand
CONELOG® ScanPosts			

All screws have to be tightened after at least 5 minutes with the corresponding torque!

CONELOG® PROSTHETICS

IMPRESSION TAKING, BITE REGISTRATION, FABRICATION OF THE PLASTER MODEL

IMPRESSION TAKING

Art. No.	Article	Ø in mm	Dimensions in mm	Material
CONELOG® Impression posts, open tray, incl. fixing screw (The fixing screw can be shortened extra-oral by 3 mm with a screwdriver, hex.)				
C2121.3300		3.3	19.3/22.3	Titanium alloy
C2121.3800		3.8	19.3/22.3	
C2121.4300		4.3	19.3/22.3	
C2121.5000		5.0	19.3/22.3	

CONELOG® Impression posts, closed tray, incl. impression cap, bite registration cap and fixing screw

C2110.3300		3.3	—	Titanium alloy/ POM
C2110.3800		3.8	—	
C2110.4300		4.3	—	
C2110.5000		5.0	—	

Impression caps for Impression posts, closed tray, (5 units)

J2111.3300		3.3	—	POM
J2111.3800		3.8	—	
J2111.4300		4.3	—	
J2111.5000		5.0	—	

BITE REGISTRATION

CONELOG® Bite registration posts, incl. fixing screw and bite registration cap

C2140.3300		3.3	—	Titanium alloy/ POM
C2140.3800		3.8	—	
C2140.4300		4.3	—	
C2140.5000		5.0	—	

Bite registration caps (5 units)

J2112.3300		3.3	—	POM
J2112.3800		3.8	—	
J2112.4300		4.3	—	
J2112.5000		5.0	—	

POM: Polyoxymethylene
H: height in mm

FABRICATION OF THE PLASTER MODEL

Art. No.	Article	Ø in mm	GH in mm	Material
----------	---------	------------	-------------	----------

CONELOG® Lab analogs for CONELOG® Abutments

C3010.3300		3.3	—	Titanium alloy
C3010.3800		3.8	—	
C3010.4300		4.3	—	
C3010.5000		5.0	—	

SINGLE-CROWN RESTORATIONS

TEMPORARY RESTORATIONS


CONELOG® Temporary abutments, preparable, incl. CONELOG® Abutment screw

C2239.3300		3.3	—	Titanium alloy
C2239.3800		3.8	—	
C2239.4300		4.3	—	
C2239.5000		5.0	—	


CROWN AND BRIDGE RESTORATIONS

CONELOG® ESTHOMIC® ABUTMENTS FOR CEMENTED CROWN AND BRIDGE RESTORATIONS

CONELOG® Esthomic® Abutments, straight, preparable, incl. CONELOG® Abutment screw

C2226.3815		3.8	1.5-2.5	Titanium alloy
C2226.3830			3.0-4.5	
C2226.4315		4.3	1.5-2.5	
C2226.4330			3.0-4.5	
C2226.5015		5.0	1.5-2.5	
C2226.5030			3.0-4.5	

CONELOG® Esthomic® Abutments, 15° angled, type A, preparable, incl. CONELOG® Abutment screw

C2227.3815		3.8	1.5-2.5	Titanium alloy
C2227.3830			3.0-4.5	
C2227.4315		4.3	1.5-2.5	
C2227.4330			3.0-4.5	
C2227.5015		5.0	1.5-2.5	
C2227.5030			3.0-4.5	


GH: gingiva height

POM: Polyoxymethylene
H: height in mm


CONELOG® PROSTHETICS

CROWN AND BRIDGE RESTORATIONS


CONELOG® ESTHOMIC® ABUTMENTS FOR CEMENTED CROWN AND BRIDGE RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material
CONELOG® Esthomic® Abutments, 15° angled, type B, preparable, incl. CONELOG® Abutment screw				
C2228.3815 C2228.3830		3.8	1.5-2.5 3.0-4.5	Titanium alloy
C2228.4315 C2228.4330		4.3	1.5-2.5 3.0-4.5	
C2228.5015 C2228.5030		5.0	1.5-2.5 3.0-4.5	


CONELOG® Esthomic® Abutments, 20° angled, type A, preparable, incl. CONELOG® Abutment screw

C2231.3815 C2231.3830		3.8	1.5-2.5 3.0-4.5	Titanium alloy
C2231.4315 C2231.4330		4.3	1.5-2.5 3.0-4.5	
C2231.5015 C2231.5030		5.0	1.5-2.5 3.0-4.5	

CONELOG® Esthomic® Abutments, 20° angled, type B, preparable, incl. CONELOG® Abutment screw

C2232.3815 C2232.3830		3.8	1.5-2.5 3.0-4.5	Titanium alloy
C2232.4315 C2232.4330		4.3	1.5-2.5 3.0-4.5	
C2232.5015 C2232.5030		5.0	1.5-2.5 3.0-4.5	


CONELOG® Esthomic® Abutments, Inset, preparable, incl. CONELOG® Abutment screw

C2235.3320		3.3	2.0-3.3	Titanium alloy
C2235.3820		3.8	2.0-3.3	
C2235.4320		4.3	2.0-3.3	
C2235.5020		5.0	2.0-3.3	

GH: gingiva height

H: height in mm

Description of CONELOG® Esthomic® Abutments type A and B

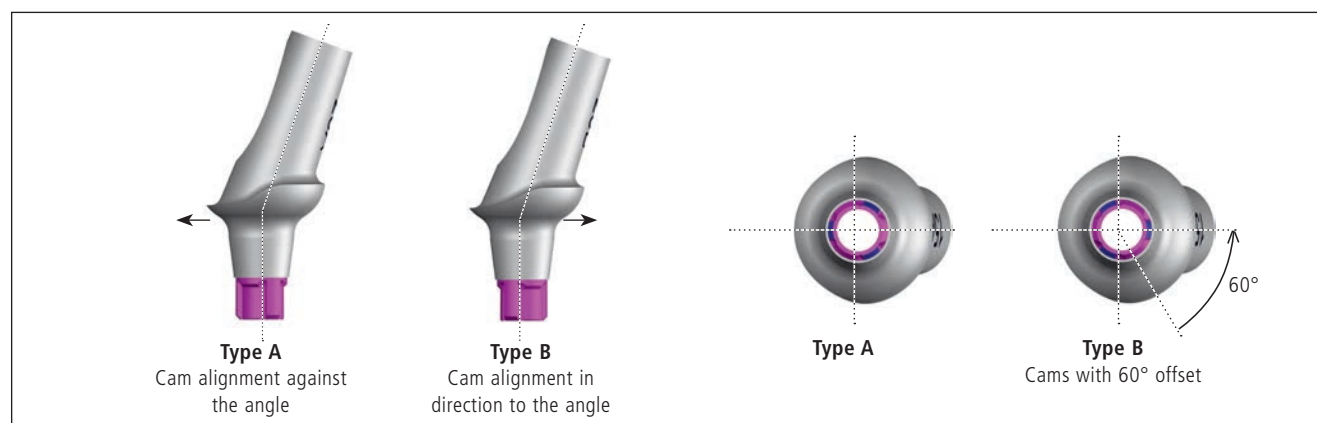

CONELOG® PROSTHETICS

CROWN AND BRIDGE RESTORATIONS

CONELOG® UNIVERSAL ABUTMENT FOR CEMENTED CROWN AND BRIDGE RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material
C2211.3300		3.3*	—	Titanium alloy
C2211.3800		3.8	—	
C2211.4300		4.3	—	
C2211.5000		5.0	—	

CONELOG® GOLD-PLASTIC ABUTMENTS FOR CROWN AND BRIDGE RESTORATIONS

CONELOG® Gold-plastic abutments, cast-on, incl. CONELOG® Abutment screw


C2246.3300		0,31 g**	3.3*	—	Cast-on gold alloy/POM
C2246.3800		0,36 g**	3.8	—	
C2246.4300		0,36 g**	4.3	—	
C2246.5000		0,55 g**	5.0	—	

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors (Ø 3.3 mm not for double crown restorations)

** Noble metal weight approx.

CONELOG® LOGFIT® PROSTHETIC SYSTEM FOR CEMENTED CROWN AND BRIDGE RESTORATIONS

CONELOG® Logfit® Abutments, incl. CONELOG® Abutment screw

C2550.3810		3.8	1.0	Titanium alloy
C2550.3825			2.5	
C2550.4310		4.3	1.0	
C2550.4325			2.5	
C2550.5010		5.0	1.0	
C2550.5025			2.5	

Logfit® Impression caps

J2551.4300		3.8	—	POM
J2551.4300		4.3	—	
J2551.6000		5.0	—	

Logfit® Analogs

J2552.4300		3.8	—	Titanium alloy
J2552.4300		4.3	—	
J2552.6000		5.0	—	

GH: gingiva height

POM: Polyoxymethylene
H: height in mm

CONELOG® PROSTHETICS

CROWN AND BRIDGE RESTORATIONS

CONELOG® LOGFIT® PROSTHETIC SYSTEM FOR CEMENTED CROWN AND BRIDGE RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material
----------	---------	------------	-------------	----------

Logfit® Plastic copings, for crowns (with rotation securing device), burn-out

J2553.4302		3.8	—	POM
J2553.4302		4.3	—	
J2553.6002		5.0	—	

Logfit® Plastic copings, for bridges (without rotation securing device), burn-out

J2553.4301		3.8	—	POM
J2553.4301		4.3	—	
J2553.6001		5.0	—	

POM: Polyoxymethylene
H: height in mm

ACCESSORIES FOR CONELOG® ABUTMENTS

CONELOG® Abutment screws for the definitive screwing of abutments into the implant

C4005.1601		CONELOG® Abutment screw, hex	3.3	Thread M 1.6	Titanium alloy
			3.8		
			4.3		
C4005.2001			5.0	Thread M 2.0	

CONELOG® Lab screws for the fixation of abutments on the working model

C4006.1601		CONELOG® Lab screw, hex, brown anodized	3.3	Thread M 1.6	Titanium alloy
			3.8		
			4.3		
C4006.2001			5.0	Thread M 2.0	

Note: Lab screws be used on working models only.

CONELOG® PROSTHETICS

CROWN, BRIDGE AND HYBRID RESTORATIONS

CAD/CAM PROSTHETICS

Art. No.	Article		Ø in mm	GH in mm	Material
CONELOG® Titanium bases CAD/CAM, bonding base for individual CAD/CAM fabricated dental prosthesis, incl. CONELOG® Abutment screw for Titanium base CAD/CAM and CONELOG® Bonding aid (POM)					
C2244.3308** C2244.3320**	C2242.3308**/* C2242.3320**/*		3.3	0.8 2.0	Titanium alloy
C2244.3808 C2244.3820	C2242.3808* C2242.3820*		3.8	0.8 2.0	
C2244.4308 C2244.4320	C2242.4308* C2242.4320*		4.3	0.8 2.0	
C2244.5008 C2244.5020	C2242.5008* C2242.5020*		5.0	0.8 2.0	

**only for crown restorations in the region of the upper lateral and lower lateral and central incisors.

* available from September 2014. The new CONELOG® Titanium base CAD/CAM with modified screw channel is compatible with Sirona inCoris ZI meso blocks and replaces the existing Titanium base CAD/CAM with Art. No. C2244.xxxx. The new Titanium base can only be used with the new CONELOG® Abutment screw for Titanium base CAD/CAM, dark purple anodized.

Note: To achieve high user friendliness and precision, the geometries of the CONELOG® Titanium bases CAD/CAM are already stored in some dental CAD systems as a part library.

For more information see www.camlog.com/products/conelog/digital-technology.

CONELOG® Modeling aids for CONELOG® Titanium base CAD/CAM, burn-out, for fabricating mesostructures and crowns

C2244.3302	C2242.3302*		3.3	POM
C2244.3802	C2242.3802*		3.8	
C2244.4302	C2242.4302*		4.3	
C2244.5002	C2242.5002*		5.0	

* available from fall 2014. The new CONELOG® Modeling aid with modified screw channel replaces the existing modeling aid with Art.-No. C2244.xxxx and can only be used with the new CONELOG® Abutment screw for Titanium base CAD/CAM, dark purple anodized.

GH: gingiva height

POM: Polyoxymethylene
H: height in mm

CONELOG® PROSTHETICS

CROWN, BRIDGE AND HYBRID RESTORATIONS

CAD/CAM PROSTHETICS

Art. No.	Article	Ø in mm	Dimensions in mm	Material
CONELOG® Scanbodies, for optical, 3-dimensional localization of CONELOG® Implants in the mouth or CONELOG® Lab analogs in the working model, incl. CONELOG® Abutment screw, sterile				
C2600.3310		3.3	—	PEEK
C2600.4310		3.8	—	
		4.3	—	
C2600.5010		5.0	—	

Note: Some scan systems require the use of system-innate scan abutments.

For information on the compatibility of the CONELOG® Scanbody with suitable dental CAD systems see www.camlog.com/products/conelog/digital-technology.

CONELOG® ScanPosts for Sirona Scanbody, for digital recording of the CONELOG® Implant or lab analog position, incl. CONELOG® Abutment screw

C2620.3306		3.3	—	Titanium alloy
C2620.3806		3.8	—	
C2620.4306		4.3	—	
C2620.5006		5.0	—	

ACCESSORIES FOR CAD/CAM PROSTHETICS

CONELOG® Abutment screws for Titanium base CAD/CAM, hex, for definitive screw connection into the implant

C4005.1601		C4015.1601*		3.3	Thread M 1.6	Titanium alloy
				3.8		
				4.3		
C4005.2001		C4015.2001*		5.0	Thread M 2.0	

* available from September 2014. The new modified and dark purple anodized CONELOG® Abutment screw for Titanium base CAD/CAM replaces the existing abutment screw for the new Titanium base CAD/CAM.

CONELOG® Lab screws for Titanium base CAD/CAM, hex, for the fixation on the working model

C4006.1601	C4016.1601*		3.3	Thread M 1.6	Titanium alloy
			3.8		
			4.3		
C4006.2001	C4016.2001*		5.0	Thread M 2.0	

* available from fall 2014. The new modified CONELOG® Lab screw for Titanium base CAD/CAM replaces the existing lab screw for the new Titanium base CAD/CAM.

Note: Lab screws be used on working models only.



GH: gingiva height

PEEK: Polyetheretherketon
H: height in mm

CONELOG® PROSTHETICS

CROWN, BRIDGE AND HYBRID RESTORATIONS

VARIO SR PROSTHETIC COMPONENTS FOR OCCLUSALLY SCREW-RETAINED RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material	
CONELOG® Vario SR abutments, straight, incl. CONELOG® Vario SR abutment screw, sterile					
C2560.3808		3.8	1.0	Titanium alloy	
C2560.4308		4.3	1.0		
C2560.5008		5.0	1.0		
CONELOG® Vario SR abutments, 20° angled, incl. CONELOG® Abutment screw, sterile					
C2561.3800		H 6.5	3.8	3.5-1.9	Titanium alloy
C2561.4300		H 6.5	4.3	3.5-1.9	
C2561.5000		H 7.0	5.0	4.0-1.8	
CONELOG® Vario SR abutments, 30° angled, incl. CONELOG® Abutment screw, sterile					
C2562.3800		H 6.0	3.8	3.5-1.1	Titanium alloy
C2562.4300		H 6.0	4.3	3.5-1.1	
C2562.5000		H 7.0	5.0	4.5-1.3	
Impression caps, open and closed tray					
J2566.4300		H 3.0	3.8	—	Titanium alloy
		H 10.0	4.3		
J2566.6000			5.0		
J2565.4300		H 11.0	3.8	—	Titanium alloy
			4.3		
J2565.6000			5.0		
Fabrication of the plaster model					
J2567.4300			3.8	—	Titanium alloy
			4.3		
J2567.6000			5.0		

GH: gingiva height
H: height in mm

CONOLOG® PROSTHETICS

CROWN, BRIDGE AND HYBRID RESTORATIONS

VARIO SR PROSTHETIC COMPONENTS FOR OCCLUSALLY SCREW-RETAINED RESTORATIONS

Art. No.		Article	Ø in mm	GH in mm	Material
Cast crown, bridge and bar restorations					
J2563.4302		Vario SR plastic coping, crown, with triple-surface antirotation, burn-out	3.8	—	POM
			4.3		
J2563.6002			5.0		
J2563.4301		Vario SR plastic coping, bridge, burn-out (2 units)	3.8	—	POM
			4.3		
J2563.6001			5.0		
J2563.4303		Vario SR plastic coping, crown, with single-surface antirotation, for angled Vario SR abutments, burn-out	3.8	—	POM
			4.3		
J2563.6003			5.0		
Temporary or final bridge restorations					
J2564.4301		Vario SR titanium cap, bridge, incl. Vario SR prosthetic screw	3.8	—	Titanium alloy
			4.3		
J2564.6001			5.0		
Laser-welded bar restorations					
J2570.4300		Vario SR base for bar, laser-weldable, incl. Vario SR prosthetic screw	3.8	—	Titanium Grade 4
			4.3		
J2570.6000			5.0		
Accessories for Vario SR					
J2568.4300		Vario SR protection cap, sterile	3.8	—	Titanium alloy
			4.3		
J2568.6000			5.0		
			GH: gingiva height H: height in mm		
			POM: Polyoxymethylene		

GH: gingiva height
H: height in mm

POM: Polyoxymethylene

CONELOG® PROSTHETICS

CROWN, BRIDGE AND HYBRID RESTORATIONS

VARIO SR PROSTHETIC COMPONENTS FOR OCCLUSALLY SCREW-RETAINED RESTORATIONS

Art. No.		Article	Ø in mm	Dimensions in mm	Material
Accessories for Vario SR					
J2569.0001		Vario SR aligning tool 20° , for insertion post, sterile	3.8 4.3 5.0	—	Copolycarbonate
J2569.0002		Vario SR aligning tool 30° , for insertion post, sterile	3.8 4.3 5.0	—	Copolycarbonate
C4007.1600		CONELOG® Vario SR abutment screw , hex, for CONELOG® Vario SR abutment, straight	3.8 4.3	Thread M 1.6	Titanium alloy
C4007.2000		CONELOG® Vario SR abutment screw , hex, for CONELOG® Vario SR abutment, straight	5.0	Thread M 2.0	Titanium alloy
C4005.1601		CONELOG® Abutment screw , hex, for CONELOG® Vario SR abutment, 20°/30° angled,	3.8 4.3	Thread M 1.6	Titanium alloy
C4005.2001		CONELOG® Abutment screw , hex, for CONELOG® Vario SR abutment, 20°/30° angled,	5.0	Thread M 2.0	Titanium alloy
C4008.1600		CONELOG® Vario SR lab screw , hex, brown anodized, for CONELOG® Vario SR abutment, straight	3.8 4.3	Thread M 1.6	Titanium alloy
C4008.2000		CONELOG® Vario SR lab screw , hex, brown anodized, for CONELOG® Vario SR abutment, straight	5.0	Thread M 2.0	Titanium alloy
C4006.1601		CONELOG® Lab screw , hex, brown anodized, for CONELOG® Vario SR abutment, 20°/30° angled	3.8 4.3	Thread M 1.6	Titanium alloy
C4006.2001		CONELOG® Lab screw , hex, brown anodized, for CONELOG® Vario SR abutment, 20°/30° angled	5.0	Thread M 2.0	Titanium alloy
J4005.2004		Vario SR prosthetic screw , hex, yellow anodized	3.8 4.3 5.0	Thread M 2.0	Titanium alloy

Note: Lab screws be used on working models only.

CONELOG® PROSTHETICS

HYBRID RESTORATIONS

BAR RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material
----------	---------	------------	-------------	----------

CONELOG® Bar Abutments

C2255.3310 C2255.3325		3.3	1.0 2.5	Titanium alloy
C2255.3810 C2255.3825 C2255.3840		3.8	1.0 2.5 4.0	
C2255.4310 C2255.4325 C2255.4340		4.3	1.0 2.5 4.0	
C2255.5010 C2255.5025 C2255.5040		5.0	1.0 2.5 4.0	

Impression post for CONELOG® Bar abutment

C2130.4300		H 6.5	3.3	—	Titanium alloy
		H 6.5	3.8		
		H 6.5	4.3		
		H 7.0	5.0		

Healing cap for CONELOG® Bar abutment

C2030.4300		H 3.7	3.3	—	Titanium alloy
			3.8		
			4.3		
			5.0		

Soldering aid/bar-lab analog for CONELOG® Bar abutment

C3020.4300		3.3	—	Stainless steel
		3.8		
		4.3		
		5.0		

Screw, hex, for bar abutment, screw for bases for bar abutments for impression taking, open tray and soldering

J4005.1610		3.3	Thread M 1.6	Stainless steel
		3.8		
		4.3		
		5.0		

GH: gingiva height
H: height in mm

Art. No.	Article	Ø in mm	Dimensions	Material	
Base for CONELOG® Bar abutment, burn-out					
C2257.3300			3.3	—	POM
			3.8		
			4.3		
			5.0		
Base for CONELOG® Bar abutment, cast-on					
C2263.4300		Noble metal weight approx. 0,48 g	3.3		Cast-on gold alloy/POM
			3.8		
			4.3		
			5.0		
Base for CONELOG® Bar abutment, solderable					
C2258.4300			3.3		Solderable gold alloy
			3.8		
			4.3		
			5.0		
Base for CONELOG® Bar abutment, laser-weldable					
C2262.4300			3.3	—	Titanium Grade 4
			3.8		
			4.3		
			5.0		
Titanium bonding base for CONELOG® Bar abutment, Passive-Fit					
C2260.3300			3.3	—	Titanium alloy
			3.8		
			4.3		
			5.0		

POM: Polyoxymethylene
H: height in mm

CONELOG® PROSTHETICS

HYBRID RESTORATIONS

BAR RESTORATIONS

Art. No.	Article	Ø in mm	GH in mm	Material
Sleeve for titanium bonding base, burn-out, Passive-Fit				
C2261.3300		3.3	—	POM
		3.8		
		4.3		
		5.0		
Holding pin for CONELOG® Bar abutment/CONELOG® Bar lab analog, yellow, (4 units)				
C2256.1600		3.3	Thread M 1.6	POM
		3.8		
		4.3		
		5.0		
Prosthetic screw, for bar abutments, hex, (also for Passive-Fit)				
J4005.1602		3.3	Thread M 1.6	Titanium alloy
		3.8		
		4.3		
		5.0		

BALL ABUTMENT ANCHORING SYSTEM

CONELOG® Ball abutment sets

incl. male part and matrix CM Dalbo®-Plus, red duplication aid/spacer, stabilizing ring and ball abutment analog

C2250.3315 C2250.3330		3.3	1.5	Titanium alloy/ Titanium Grade 4/ Gold alloy/Brass/ Plastic
C2250.3815 C2250.3830 C2250.3845			3.0	
C2250.4315 C2250.4330 C2250.4345		3.8	1.5	
C2250.5015 C2250.5030 C2250.5045			3.0	
C2250.3315 C2250.3330		4.3	4.5	
C2250.3815 C2250.3830 C2250.3845			1.5	
C2250.4315 C2250.4330 C2250.4345		5.0	3.0	
C2250.5015 C2250.5030 C2250.5045			4.5	

GH: gingiva height
H: height in mm

POM: Polyoxymethylene

BALL ABUTMENT ANCHORING SYSTEM

Art. No.	Article	Ø in mm	GH in mm	Material
CONELOG® Ball abutments, male part, incl. stabilizing ring				
C2249.3315 C2249.3330		3.3	1.5 3.0	Titanium alloy/ Plastic
C2249.3815 C2249.3830 C2249.3845		3.8	1.5 3.0 4.5	
C2249.4315 C2249.4330 C2249.4345		4.3	1.5 3.0 4.5	
C2249.5015 C2249.5030 C2249.5045		5.0	1.5 3.0 4.5	

Matrix CM Dalbo®-Plus, for ball abutment, incl. lamella retention insert

J2250.0005		3.3	–	Titanium Grade 4/ Gold alloy
		3.8		
		4.3		
		5.0		

Lamella retention insert, for matrix CM Dalbo®-Plus

J2250.0007		3.3	–	Gold alloy
		3.8		
		4.3		
		5.0		

Ball abutment analogs, incl. stabilizing ring

C3015.3300		3.3	–	Brass/ Plastic
		3.8		
		4.3		
C3015.5000		5.0		

GH: gingiva height

Dalbo®-Plus is a registered trademark of Cendres + Métaux SA, Biel, Switzerland.

CONELOG® PROSTHETICS

HYBRID RESTORATIONS

LOCATOR® ANCHORING SYSTEM

Art. No.	Article	Ø in mm	GH in mm	Material
----------	---------	------------	-------------	----------

CONELOG® Locator® Abutments

C2253.3310 C2253.3320 C2253.3330 C2253.3340		3.3	1.0	Titanium alloy/TiN
C2253.3810 C2253.3820 C2253.3830 C2253.3840 C2253.3850			2.0	
			3.0	
			4.0	
C2253.4310 C2253.4320 C2253.4330 C2253.4340 C2253.4350		3.8	1.0	
			2.0	
			3.0	
			4.0	
			5.0	
C2253.5010 C2253.5020 C2253.5030 C2253.5040 C2253.5050		4.3	1.0	
			2.0	
			3.0	
			4.0	
			5.0	
			1.0	
			2.0	
			3.0	
			4.0	
			5.0	


Impression taking

J2253.0200		Locator® Impression cap (4 units)		3.3	–	Aluminum/ Polyethylene
				3.8		
				4.3		
				5.0		

Fabrication of the plaster model

J2253.0340		Locator® Analog, (4 units)		3.3	–	Aluminum
				3.8		
				4.3		
				5.0		

GH: gingiva height TiN: Titanium nitride-coated

Art. No.		Article	Ø in mm	Dimensions in mm	Material
Locator® Male processing packages					
J2253.0102		Locator® Male processing packages (2 units), Content per package: 1 Titanium housing with processing replacement male, 1 Block out spacer white, 1 Replacement male clear, 1 Replacement male pink, 1 Replacement male blue	3.3	—	Titanium alloy/ Polyethylene/ Teflon/Nylon
			3.8		
			4.3		
			5.0		
J2253.0112		Locator® Male processing packages for extended range* (2 units), Content per package: 1 Titanium housing with processing replacement male, 1 Block out spacer white, 1 Replacement male green, 1 Replacement male orange, 1 Replacement male red	3.8	—	Titanium alloy/ Polyethylene/ Teflon/Nylon
			4.3		
			5.0		
* nonlicensed for implant diameter 3.3 mm					
Locator® Accessories					
J2253.0401		Locator® Block out spacer (20 units)	3.3	—	Teflon
			3.8		
			4.3		
			5.0		
J2253.0402		Locator® Processing replacement male (4 units)	3.3	—	Polyethylene
			3.8		
			4.3		
			5.0		

CONELOG® PROSTHETICS

HYBRID RESTORATIONS

LOCATOR® ANCHORING SYSTEM

Art. No.		Article	Ø in mm	Dimensions in mm	Material
Locator® Replacement males					
J2253.1005		Locator® Replacement male, clear, STRONG, Div.: 0°-10° (4 units)	3.3	—	Nylon
			3.8		
			4.3		
			5.0		
J2253.1003		Locator® Replacement male, pink, MEDIUM, Div.: 0°-10° (4 units)	3.3	—	Nylon
			3.8		
			4.3		
			5.0		
J2253.1002		Locator® Replacement male, blue, LIGHT, Div.: 0°-10° (4 units)	3.3	—	Nylon
			3.8		
			4.3		
			5.0		

Locator® Replacement males for extended range

J2253.2004		Locator® Replacement male for extended range*, green, STRONG, Div.: 10°-20° (4 units)	3.8	—	Nylon
			4.3		
			5.0		
J2253.2003		Locator® Replacement male for extended range*, orange, MEDIUM, Div.: 10°-20° (4 units)	3.8	—	Nylon
			4.3		
			5.0		
J2253.2002		Locator® Replacement male for extended range*, red, LIGHT, Div.: 10°-20° (4 units)	3.8	—	Nylon
			4.3		
			5.0		
J2253.2000		Locator® Replacement male for extended range*, gray, NO RETENTION, Div.: 0°-20° (4 units)	3.8	—	Nylon
			4.3		
			5.0		

* nonlicensed for implant diameter 3.3 mm


Manufacturer Locator®:
Zest Anchors LLC
Escondido, CA 92029, USA


Locator® is a registered trademark of Zest Anchors LLC

CONELOG® PROSTHETICS

HYBRID RESTORATIONS

DOUBLE CROWN RESTORATIONS WITH CONELOG® UNIVERSAL AND TELESCOPE ABUTMENTS

Art. No.	Article	Ø in mm	Dimensions in mm	Material
CONELOG® Universal abutments for double crown restorations, preparable, incl. CONELOG® Abutment screw				
C2211.3800		3.8	—	Titanium alloy
C2211.4300		4.3	—	
C2211.5000		5.0	—	

CONELOG® Telescope abutments for double crown restorations, preparable, incl. CONELOG® Abutment screw				
C2212.3800		3.8	—	Titanium alloy
C2212.4300		4.3	—	
C2212.5000		5.0	—	

H: height in mm

ACCESSORIES FOR CONELOG® ABUTMENTS

CONELOG® Abutment screws for the definitive screwing of abutments into the implant

C4005.1601		CONELOG® Abutment screw, hex	3.3	Thread M 1.6	Titanium alloy
			3.8		
			4.3		
C4005.2001			5.0	Thread M 2.0	

CONELOG® Lab screws for the fixation of abutments on the working model

C4006.1601		CONELOG® Lab screw, hex, brown anodized	3.3	Thread M 1.6	Titanium alloy
			3.8		
			4.3		
C4006.2001			5.0	Thread M 2.0	

Note: Lab screws be used on working models only.

CONELOG® PROSTHETICS

INSTRUMENTS FOR DENTAL TECHNICIANS

Art. No.	Article	Ø in mm	Material
----------	---------	------------	----------

Universal holders

C3709.0010	CONELOG® Universal holder, incl. 2 CONELOG® Lab screws, hex, and CONELOG® Abutment collets for Ø 3.3/3.8/4.3/5.0 mm, for grinding CONELOG® Abutments	–	Stainless steel/ Titanium alloy
------------	---	---	------------------------------------



J3709.0015	Universal holder	–	Stainless steel
------------	-------------------------	---	-----------------



CONELOG® Abutment collets, for universal holder, for grinding CONELOG® Abutments

C3709.3300		3.3	Titanium alloy
C3709.3800		3.8	
C3709.4300		4.3	
C3709.5000		5.0	

Reworking reamers

J3711.0010	Reworking reamer, for base for bar abutment, burn-out, plane surface/cone seat	3.3	Stainless steel
		3.8	
		4.3	
		5.0	



J3711.0020	Reworking reamer, for base for bar abutment, burn-out, screw seat	3.3	Stainless steel
		3.8	
		4.3	
		5.0	



CONELOG® PROSTHETICS

CONELOG® SELECTION ABUTMENTS

Art. No.	Article	Ø in mm	GH in mm	Material
----------	---------	------------	-------------	----------

C8011.1000



CONELOG® Abutment selection kit, content (2 units each):

CONELOG® Esthomic® Selection abutment, straight	3.8	1.5-2.5	POM
CONELOG® Esthomic® Selection abutment, straight	3.8	3.0-4.5	
CONELOG® Esthomic® Selection abutment, straight	4.3	1.5-2.5	
CONELOG® Esthomic® Selection abutment, straight	4.3	3.0-4.5	
CONELOG® Esthomic® Selection abutment, straight	5.0	1.5-2.5	
CONELOG® Esthomic® Selection abutment, straight	5.0	3.0-4.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type A	3.8	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type A	4.3	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type A	5.0	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type B	3.8	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type B	4.3	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 15° angled, type B	5.0	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type A	3.8	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type A	4.3	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type A	5.0	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type B	3.8	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type B	4.3	1.5-2.5	
CONELOG® Esthomic® Selection abutment, 20° angled, type B	5.0	1.5-2.5	
CONELOG® Vario SR selection abutment, straight	3.8	1.0	
CONELOG® Vario SR selection abutment, straight	4.3	1.0	
CONELOG® Vario SR selection abutment, straight	5.0	1.0	
CONELOG® Vario SR selection abutment, 20° angled	3.8	3.5-1.9	
CONELOG® Vario SR selection abutment, 20° angled	4.3	3.5-1.9	
CONELOG® Vario SR selection abutment, 20° angled	5.0	4.0-1.8	
CONELOG® Vario SR selection abutment, 30° angled	3.8	3.5-1.1	
CONELOG® Vario SR selection abutment, 30° angled	4.3	3.5-1.1	
CONELOG® Vario SR selection abutment, 30° angled	5.0	4.5-1.3	

GH: gingiva height POM: Polyoxymethylene

Attention, do not use selection abutments on patients!

AUXILIARY ARTICLES

CONTENT

AUXILIARY ARTICLES	65
IMPLANTS FOR PRACTICE	66
DEMONSTRATION MODELS	66
MACRO MODEL	66
CAMLOG LITERATURE	67

AUXILIARY ARTICLES

IMPLANTS FOR PRACTICE

Art. No.		Article	Ø in mm	Length in mm	Material
C1069.3813		CONELOG® SCREW-LINE Implant for practice, incl. insertion post and CONELOG® Cover screw, yellow anodized	3.8	13	Titanium alloy
C1069.4313-01		CONELOG® SCREW-LINE Implant for practice, incl. insertion post and CONELOG® Cover screw, red anodized (10 units)	4.3	13	Titanium alloy

Attention, do not use implants for practice on patients!

DEMONSTRATION MODELS

C8070.1020		CONELOG® Demonstration model, acrylic glass, upper jaw, 4 CONELOG® SCREW-LINE Implants, 4 x Ø 4.3 mm	Acrylic glass/ titanium
C8050.1040		CONELOG® Demonstration model, acrylic glass, lower jaw, 4 CONELOG® SCREW-LINE Implants, 4 x Ø 4.3 mm	Acrylic glass/ titanium
J8070.2050		Edentulous mandible incl. mounting plate	Plastic

MACRO MODEL

C8010.1010		CONELOG® Macro model, Scale 3: 1 Content: – 1 CONELOG® SCREW-LINE Implant – 1 CONELOG® Esthomic® Abutment, straight – 1 CONELOG® Abutment screw, hex – 1 Screwdriver, hex – 1 Premolar, suitable for CONELOG® Esthomic® Abutment, straight – 1 Acrylic socket	Plastic/ Stainless steel
------------	---	---	-----------------------------

Art. No.

Article



Patient brochure


Questions and answers to dental implants



Implant pass

Patient-specific documentation of implant restoration

Packaging units: 10 units



Patient advice sheets

Set á 4 sheets, A4



Presentation folder

A4, laminated



Poster

Format: 50 x 70 cm

AUXILIARY ARTICLE

CAMLOG LITERATURE

Art. No.

Article



Appointment pad

50 sheets/pad, A7

Packaging units: 5 units

B2012.0100



IMPLANT PROSTHETICS

DVD compendium

Four teams – their concepts and solutions, Volume 1-4

A. Kirsch, K. L. Ackermann, G. Neuendorff,

A. Happe, A. Nolte, S. Wolfart, V. Weber, F. Beuer,

M. Stimmelmayer, J. Schweiger

2012 Quintessence Publishing Co, Ltd

INFORMATION	69
MATERIALS	70

INFORMATION

MATERIALS

Titanium Grade 4

Properties (ASTM F67):

Chemical structure (in %):	O	≤ 0.4
	Fe	≤ 0.5
	C	≤ 0.08
	N	≤ 0.05
	H	≤ 0.015
	Ti	Rest
Mechanical properties:	Tensile strength	≥ 550 MPa
	Elongation at break	≥ 15 %

Titanium alloy Ti6Al4V ELI

Properties (ASTM F136):

Chemical structure (in %):	Al	5.5 - 6.5
	V	3.5 - 4.5
	Fe	≤ 0.25
	C	≤ 0.08
	N	≤ 0.05
	O	≤ 0.13
	H	≤ 0.012
	Ti	Rest
Mechanical properties:	Tensile strength	≥ 860 MPa
	Elongation at break	≥ 10 %

Cast-on gold alloy CONELOG® Gold-plastic abutment

Properties:

Chemical structure (in %):	Au	60
	Pd	20
	Pt	19
	Ir	1
Physical properties:	Melting range	1400 - 1490 °C
	Density	17.5 g/cm ³
	E-Modul	136 GPa
	Coefficient of thermal expansion (25-500°C)	11.9 µm/m·°C
	Coefficient of thermal expansion (25-600°C)	12.2 µm/m·°C
	Color	white
Mechanical properties:	drawn	
	Hardness HV5	> 215
	Tensile strength (Rm)	> 750 MPa
	0.2% Elongation limit (Rp 0.2%)	> 650 MPa
	Elongation at break	> 2%

Cast-on gold alloy Base for CONELOG® Bar abutment

Properties:

Chemical structure (in %):	Au	60
	Pt	19
	Pd	20
	Ir	1
Mechanical properties:	Density	17.5 g/cm ³
	Color	white
	Liquidus	1490 °C
	Solidus	1400 °C
	Coefficient of thermal expansion (25-500°C)	12.5 µm/m·°C
	Coefficient of thermal expansion (25-600°C)	12.6 µm/m·°C
	E-Modul	136.000 GPa
		hardened 700 °C / 30 min.
	Hardness HV5	210
	0.2 % Elongation limit	450-570 MPa
	Elongation at break	min 10 %
	Tensile strength MPa	530-650

Solderable gold alloy Base for CONELOG® Bar abutment

Properties:

Chemical structure (in %):	Au	70.00
	Pt	8.50
	Ag	13.40
	Pd	-
	Cu	7.50
	Zn	0.50
	Ir	0.10
	Rh	-
	Ru	-
Mechanical properties:	Color	yellow
	Melting range	895 - 1010 °C
	Hardness	
	annealed HV5	170
	hardened HV5	295
	self hardened HV5	280

INDEX	73
ALPHABETICAL	74
ARTICLE NUMBERS	81

INDEX

ALPHABETICAL

Article	Art. No.	Page
A		
Adapter for screw implants, long, for CONELOG® SCREW-LINE Implants		
Ø 3.3 mm	C5302.3310	33
Ø 3.8/4.3 mm	C5302.4310	33
Adapter ISO shaft for angled hand piece.....	J5002.0010	33
ALTApin applicator, angled 90°	M5100.0030	31
ALTApin applicator, straight	M5100.0010	31
ALTApin applicator, straight, work element	M5200.0010	31
ALTApin magazine		
7 titanium pins, sterile, 1 unit	M1000.0050	31
7 titanium pins, sterile, 3 units	M1000.0100	31
ALTApin membrane fixator	M5100.0070	31
ALTApin pricker	M5100.0050	31
ALTApin pricker, insert	M5200.0055	31
ALTApin set	M5600.0110	31
ALTApin single patient drill, ISO shaft	M5500.0050	31
ALTApin surgery mallet	M5100.0100	31
ALTApin tray (without content)	M5600.0210	31
B		
Ball abutment analogs, incl. stabilizing ring		
Ø 3.3/3.8/4.3 mm	C3015.3300	57
Ø 5.0 mm	C3015.5000	57
Base for CONELOG® Bar abutment, burn-out		
Ø 3.3/3.8/4.3/5.0 mm	C2257.3300	55
Base for CONELOG® Bar abutment, cast-on		
Ø 3.3/3.8/4.3/5.0 mm	C2263.4300	55
Base for CONELOG® Bar abutment, laser-weldable		
Ø 3.3/3.8/4.3/5.0 mm	C2262.4300	55
Base for CONELOG® Bar abutment, solderable		
Ø 3.3/3.8/4.3/5.0 mm	C2258.4300	55
Bite registration caps (5 units)		
Ø 3.3 mm	J2112.3300	44
Ø 3.8 mm	J2112.3800	44
Ø 4.3 mm	J2112.4300	44
Ø 5.0 mm	J2112.5000	44
C		
Cardanic driver (30°)	J5300.0010	33
Cleaning cannula for drills with internal irrigation	J5002.0020	33
Cleaning needle for drills with internal irrigation	J5002.0012	33
CONELOG® Abutment collets, for universal holder		
Ø 3.3 mm	C3709.3300	62
Ø 3.8 mm	C3709.3800	62
Ø 4.3 mm	C3709.4300	62
Ø 5.0 mm	C3709.5000	62
CONELOG® Abutments screws, hex		
Ø 3.3/3.8/4.3 mm, thread M 1.6 mm	C4005.1601	48, 50, 53, 61
Ø 5.0 mm, thread M 2.0 mm	C4005.2001	48, 50, 53, 61

Article	Art. No.	Page
CONELOG® Abutment screws, hex, anodized dark purple		
Ø 3.3/3.8/4.3 mm, thread M 1.6 mm	C4015.1601	50
Ø 5.0 mm, thread M 2.0 mm	C4015.2001	50
CONELOG® Abutment selection kit	C8011.1000	63
CONELOG® Ball abutments, male part, incl. stabilizing ring		
Ø 3.3 mm, GH 1.5 mm	C2249.3315	57
Ø 3.3 mm, GH 3.0 mm	C2249.3330	57
Ø 3.8 mm, GH 1.5 mm	C2249.3815	57
Ø 3.8 mm, GH 3.0 mm	C2249.3830	57
Ø 3.8 mm, GH 4.5 mm	C2249.3845	57
Ø 4.3 mm, GH 1.5 mm	C2249.4315	57
Ø 4.3 mm, GH 3.0 mm	C2249.4330	57
Ø 4.3 mm, GH 4.5 mm	C2249.4345	57
Ø 5.0 mm, GH 1.5 mm	C2249.5015	57
Ø 5.0 mm, GH 3.0 mm	C2249.5030	57
Ø 5.0 mm, GH 4.5 mm	C2249.5045	57
CONELOG® Bar Abutments		
Ø 3.3 mm, GH 1.0 mm	C2255.3310	54
Ø 3.3 mm, GH 2.5 mm	C2255.3325	54
Ø 3.8 mm, GH 1.0 mm	C2255.3810	54
Ø 3.8 mm, GH 2.5 mm	C2255.3825	54
Ø 3.8 mm, GH 4.0 mm	C2255.3840	54
Ø 4.3 mm, GH 1.0 mm	C2255.4310	54
Ø 4.3 mm, GH 2.5 mm	C2255.4325	54
Ø 4.3 mm, GH 4.0 mm	C2255.4340	54
Ø 5.0 mm, GH 1.0 mm	C2255.5010	54
Ø 5.0 mm, GH 2.5 mm	C2255.5025	54
Ø 5.0 mm, GH 4.0 mm	C2255.5040	54
CONELOG® Ball abutment sets, incl. male part and matrix CM Dalbo®-Plus		
Ø 3.3 mm, GH 1.5 mm	C2250.3315	56
Ø 3.3 mm, GH 3.0 mm	C2250.3330	56
Ø 3.8 mm, GH 1.5 mm	C2250.3815	56
Ø 3.8 mm, GH 3.0 mm	C2250.3830	56
Ø 3.8 mm, GH 4.5 mm	C2250.3845	56
Ø 4.3 mm, GH 1.5 mm	C2250.4315	56
Ø 4.3 mm, GH 3.0 mm	C2250.4330	56
Ø 4.3 mm, GH 4.5 mm	C2250.4345	56
Ø 5.0 mm, GH 1.5 mm	C2250.5015	56
Ø 5.0 mm, GH 3.0 mm	C2250.5030	56
Ø 5.0 mm, GH 4.5 mm	C2250.5045	56
CONELOG® Bite registration posts		
Ø 3.3 mm	C2140.3300	44
Ø 3.8 mm	C2140.3800	44
Ø 4.3 mm	C2140.4300	44
Ø 5.0 mm	C2140.5000	44
CONELOG® Demonstration model, acrylic glass, lower jaw, 4 CONELOG® SCREW-LINE Implants		
Ø 4.3 mm	C8050.1040	66
CONELOG® Demonstration model, acrylic glass, upper jaw, 4 CONELOG® SCREW-LINE Implants		
Ø 4.3 mm	C8070.1020	66
CONELOG® Disconnectors for CONELOG® Abutments		
Ø 3.3/3.8/4.3 mm, thread M 1.6 mm	C5300.1601	34
Ø 5.0 mm, thread M 2.0 mm	C5300.2001	34
CONELOG® Esthomic® Abutments, 15° angled, type A		
Ø 3.8 mm, GH 1.5-2.5 mm	C2227.3815	45
Ø 3.8 mm, GH 3.0-4.5 mm	C2227.3830	45
Ø 4.3 mm, GH 1.5-2.5 mm	C2227.4315	45
Ø 4.3 mm, GH 3.0-4.5 mm	C2227.4330	45
Ø 5.0 mm, GH 1.5-2.5 mm	C2227.5015	45
Ø 5.0 mm, GH 3.0-4.5 mm	C2227.5030	45

INDEX

ALPHABETICAL

Article	Art. No.	Page
CONELOG® Esthomic® Abutments, 15° angled, type B		
Ø 3.8 mm, GH 1.5-2.5 mm	C2228.3815	46
Ø 3.8 mm, GH 3.0-4.5 mm	C2228.3830	46
Ø 4.3 mm, GH 1.5-2.5 mm	C2228.4315	46
Ø 4.3 mm, GH 3.0-4.5 mm	C2228.4330	46
Ø 5.0 mm, GH 1.5-2.5 mm	C2228.5015	46
Ø 5.0 mm, GH 3.0-4.5 mm	C2228.5030	46
CONELOG® Esthomic® Abutments, 20° angled, type A		
Ø 3.8 mm, GH 1.5-2.5 mm	C2231.3815	46
Ø 3.8 mm, GH 3.0-4.5 mm	C2231.3830	46
Ø 4.3 mm, GH 1.5-2.5 mm	C2231.4315	46
Ø 4.3 mm, GH 3.0-4.5 mm	C2231.4330	46
Ø 5.0 mm, GH 1.5-2.5 mm	C2231.5015	46
Ø 5.0 mm, GH 3.0-4.5 mm	C2231.5030	46
CONELOG® Esthomic® Abutments, 20° angled, type B		
Ø 3.8 mm, GH 1.5-2.5 mm	C2232.3815	46
Ø 3.8 mm, GH 3.0-4.5 mm	C2232.3830	46
Ø 4.3 mm, GH 1.5-2.5 mm	C2232.4315	46
Ø 4.3 mm, GH 3.0-4.5 mm	C2232.4330	46
Ø 5.0 mm, GH 1.5-2.5 mm	C2232.5015	46
Ø 5.0 mm, GH 3.0-4.5 mm	C2232.5030	46
CONELOG® Esthomic® Abutments, Inset		
Ø 3.3 mm	C2235.3320	46
Ø 3.8 mm	C2235.3820	46
Ø 4.3 mm	C2235.4320	46
Ø 5.0 mm	C2235.5020	46
CONELOG® Esthomic® Abutments, straight		
Ø 3.8 mm, GH 1.5-2.5 mm	C2226.3815	45
Ø 3.8 mm, GH 3.0-4.5 mm	C2226.3830	45
Ø 4.3 mm, GH 1.5-2.5 mm	C2226.4315	45
Ø 4.3 mm, GH 3.0-4.5 mm	C2226.4330	45
Ø 5.0 mm, GH 1.5-2.5 mm	C2226.5015	45
Ø 5.0 mm, GH 3.0-4.5 mm	C2226.5030	45
CONELOG® Gold-plastic abutments, cast-on, incl. CONELOG® Abutment screw		
Ø 3.3 mm	C2246.3300	47
Ø 3.8 mm	C2246.3800	47
Ø 4.3 mm	C2246.4300	47
Ø 5.0 mm	C2246.5000	47
CONELOG® Healing cap, bottleneck		
Ø 3.3 mm, GH 4.0 mm	C2011.3340	30
Ø 3.8 mm, GH 4.0 mm	C2011.3840	30
Ø 3.8 mm, GH 6.0 mm	C2011.3860	30
Ø 4.3 mm, GH 4.0 mm	C2011.4340	30
Ø 4.3 mm, GH 6.0 mm	C2011.4360	30
Ø 5.0 mm, GH 4.0 mm	C2011.5040	30
Ø 5.0 mm, GH 6.0 mm	C2011.5060	30
CONELOG® Healing cap, cylindrical		
Ø 3.3 mm, GH 2.0 mm	C2015.3320	30
Ø 3.3 mm, GH 4.0 mm	C2015.3340	30
Ø 3.8 mm, GH 2.0 mm	C2015.3820	30
Ø 3.8 mm, GH 4.0 mm	C2015.3840	30
Ø 3.8 mm, GH 6.0 mm	C2015.3860	30
Ø 4.3 mm, GH 2.0 mm	C2015.4320	30
Ø 4.3 mm, GH 4.0 mm	C2015.4340	30
Ø 4.3 mm, GH 6.0 mm	C2015.4360	30
Ø 5.0 mm, GH 2.0 mm	C2015.5020	30
Ø 5.0 mm, GH 4.0 mm	C2015.5040	30
Ø 5.0 mm, GH 6.0 mm	C2015.5060	30
CONELOG® Healing cap, wide body		
Ø 3.3 mm, GH 4.0 mm	C2014.3340	30
Ø 3.8 mm, GH 4.0 mm	C2014.3840	30
Ø 3.8 mm, GH 6.0 mm	C2014.3860	30
Ø 4.3 mm, GH 4.0 mm	C2014.4340	30
Ø 4.3 mm, GH 6.0 mm	C2014.4360	30
Ø 5.0 mm, GH 4.0 mm	C2014.5040	30
Ø 5.0 mm, GH 6.0 mm	C2014.5060	30

Article	Art. No.	Page
CONELOG® Impression posts, closed tray		
Ø 3.3 mm	C2110.3300	44
Ø 3.8 mm	C2110.3800	44
Ø 4.3 mm	C2110.4300	44
Ø 5.0 mm	C2110.5000	44
CONELOG® Impression posts, open tray		
Ø 3.3 mm	C2121.3300	44
Ø 3.8 mm	C2121.3800	44
Ø 4.3 mm	C2121.4300	44
Ø 5.0 mm	C2121.5000	44
CONELOG® Lab analogs		
Ø 3.3 mm	C3010.3300	45
Ø 3.8 mm	C3010.3800	45
Ø 4.3 mm	C3010.4300	45
Ø 5.0 mm	C3010.5000	45
CONELOG® Lab screws, hex, brown anodized		
Ø 3.3/3.8/4.3 mm, thread M 1.6 mm	C4006.1601	48, 50, 53, 61
Ø 5.0 mm, thread M 2.0 mm	C4006.2001	48, 50, 53, 61
CONELOG® Lab screws, hex		
Ø 3.3/3.8/4.3 mm, thread M 1.6 mm	C4016.1601	50
Ø 5.0 mm, thread M 2.0 mm	C4016.2001	50
CONELOG® Locator® Abutments		
Ø 3.3 mm, GH 1.0 mm	C2253.3310	58
Ø 3.3 mm, GH 2.0 mm	C2253.3320	58
Ø 3.3 mm, GH 3.0 mm	C2253.3330	58
Ø 3.3 mm, GH 4.0 mm	C2253.3340	58
Ø 3.8 mm, GH 1.0 mm	C2253.3810	58
Ø 3.8 mm, GH 2.0 mm	C2253.3820	58
Ø 3.8 mm, GH 3.0 mm	C2253.3830	58
Ø 3.8 mm, GH 4.0 mm	C2253.3840	58
Ø 3.8 mm, GH 5.0 mm	C2253.3850	58
Ø 4.3 mm, GH 1.0 mm	C2253.4310	58
Ø 4.3 mm, GH 2.0 mm	C2253.4320	58
Ø 4.3 mm, GH 3.0 mm	C2253.4330	58
Ø 4.3 mm, GH 4.0 mm	C2253.4340	58
Ø 4.3 mm, GH 5.0 mm	C2253.4350	58
Ø 5.0 mm, GH 1.0 mm	C2253.5010	58
Ø 5.0 mm, GH 2.0 mm	C2253.5020	58
Ø 5.0 mm, GH 3.0 mm	C2253.5030	58
Ø 5.0 mm, GH 4.0 mm	C2253.5040	58
Ø 5.0 mm, GH 5.0 mm	C2253.5050	58
CONELOG® Logfit® Abutments, incl. CONELOG® Abutment screw		
Ø 3.8 mm, GH 1.0 mm	C2550.3810	47
Ø 3.8 mm, GH 2.5 mm	C2550.3825	47
Ø 4.3 mm, GH 1.0 mm	C2550.4310	47
Ø 4.3 mm, GH 2.5 mm	C2550.4325	47
Ø 5.0 mm, GH 1.0 mm	C2550.5010	47
Ø 5.0 mm, GH 2.5 mm	C2550.5025	47
CONELOG® Macro model		
Scale 3:1	C8010.1010	66
CONELOG® Modeling aids, burn-out		
Ø 3.3 mm	C2244.3302	49
Ø 3.8 mm	C2244.3802	49
Ø 4.3 mm	C2244.4302	49
Ø 5.0 mm	C2244.5002	49
CONELOG® Modeling aids, burn-out		
Ø 3.3 mm	C2242.3302	49
Ø 3.8 mm	C2242.3802	49
Ø 4.3 mm	C2242.4302	49
Ø 5.0 mm	C2242.5002	49
CONELOG® Scanbodies, incl. CONELOG® Abutment screw, sterile		
Ø 3.3 mm	C2600.3310	50
Ø 3.8/4.3 mm	C2600.4310	50
Ø 5.0 mm	C2600.5010	50

INDEX

ALPHABETICAL

Article	Art. No.	Page
CONELOG® ScanPosts for Sirona Scanbody, incl. CONELOG® Abutment screw		
Ø 3.3 mm.....	C2620.3306	50
Ø 3.8 mm.....	C2620.3806	50
Ø 4.3 mm.....	C2620.4306	50
Ø 5.0 mm.....	C2620.5006	50
CONELOG® SCREW-LINE Implant for practice		
Ø 3.8 mm.....	C1069.3813	66
Ø 4.3 mm.....	C1069.4313-01	66
CONELOG® SCREW-LINE Implant, Promote® plus		
Ø 3.3 mm, L 9 mm.....	C1062.3309	15
Ø 3.3 mm, L 11 mm.....	C1062.3311	15
Ø 3.3 mm, L 13 mm.....	C1062.3313	15
Ø 3.3 mm, L 16 mm.....	C1062.3316	15
Ø 3.8 mm, L 7 mm.....	C1062.3807	15
Ø 3.8 mm, L 9 mm.....	C1062.3809	15
Ø 3.8 mm, L 11 mm.....	C1062.3811	15
Ø 3.8 mm, L 13 mm.....	C1062.3813	15
Ø 3.8 mm, L 16 mm.....	C1062.3816	15
Ø 4.3 mm, L 7 mm.....	C1062.4307	15
Ø 4.3 mm, L 9 mm.....	C1062.4309	15
Ø 4.3 mm, L 11 mm.....	C1062.4311	15
Ø 4.3 mm, L 13 mm.....	C1062.4313	15
Ø 4.3 mm, L 16 mm.....	C1062.4316	15
Ø 5.0 mm, L 7 mm.....	C1062.5007	15
Ø 5.0 mm, L 9 mm.....	C1062.5009	15
Ø 5.0 mm, L 11 mm.....	C1062.5011	15
Ø 5.0 mm, L 13 mm.....	C1062.5013	15
Ø 5.0 mm, L 16 mm.....	C1062.5016	15
CONELOG® Telescope abutments, preparable, incl. CONELOG® Abutment screw		
Ø 3.8 mm.....	C2212.3800	61
Ø 4.3 mm.....	C2212.4300	61
Ø 5.0 mm.....	C2212.5000	61
CONELOG® Temporary abutments		
Ø 3.3 mm.....	C2239.3300	45
Ø 3.8 mm.....	C2239.3800	45
Ø 4.3 mm.....	C2239.4300	45
Ø 5.0 mm.....	C2239.5000	45
CONELOG® Titanium bases CAD/CAM, incl. CONELOG® Abutment screw		
Ø 3.3 mm, GH 0.8 mm.....	C2244.3308	49
Ø 3.3 mm, GH 2.0 mm.....	C2244.3320	49
Ø 3.8 mm, GH 0.8 mm.....	C2244.3808	49
Ø 3.8 mm, GH 2.0 mm.....	C2244.3820	49
Ø 4.3 mm, GH 0.8 mm.....	C2244.4308	49
Ø 4.3 mm, GH 2.0 mm.....	C2244.4320	49
Ø 5.0 mm, GH 0.8 mm.....	C2244.5008	49
Ø 5.0 mm, GH 2.0 mm.....	C2244.5020	49
CONELOG® Titanium bases CAD/CAM, incl. CONELOG® Abutment screw		
Ø 3.3 mm, GH 0.8 mm.....	C2242.3308	49
Ø 3.3 mm, GH 2.0 mm.....	C2242.3320	49
Ø 3.8 mm, GH 0.8 mm.....	C2242.3808	49
Ø 3.8 mm, GH 2.0 mm.....	C2242.3820	49
Ø 4.3 mm, GH 0.8 mm.....	C2242.4308	49
Ø 4.3 mm, GH 2.0 mm.....	C2242.4320	49
Ø 5.0 mm, GH 0.8 mm.....	C2242.5008	49
Ø 5.0 mm, GH 2.0 mm.....	C2242.5020	49
CONELOG® Universal abutments incl. CONELOG® Abutment screw		
Ø 3.3 mm.....	C2211.3300	47
Ø 3.8 mm.....	C2211.3800	47, 61
Ø 4.3 mm.....	C2211.4300	47, 61
Ø 5.0 mm.....	C2211.5000	47, 61

Article	Art. No.	Page
CONELOG® Universal holder, incl. 2 CONELOG® Lab screws, hex, and CONELOG® Abutment collets		
Ø 3.3/3.8/4.3/5.0 mm.....	C3709.0010	62
CONELOG® Vario SR abutments, straight, incl. CONELOG® Vario SR abutment screw		
Ø 3.8 mm.....	C2560.3808	51
Ø 4.3 mm.....	C2560.4308	51
Ø 5.0 mm.....	C2560.5008	51
CONELOG® Vario SR abutment screw, hex, for CONELOG® Vario SR abutment, straight		
Ø 3.8/4.3 mm, thread M 1.6 mm.....	C4007.1600	53
Ø 5.0 mm, thread M 2.0 mm.....	C4007.2000	53
CONELOG® Vario SR abutments, 20° angled, incl. CONELOG® Abutment screw		
Ø 3.8 mm.....	C2561.3800	51
Ø 4.3 mm.....	C2561.4300	51
Ø 5.0 mm.....	C2561.5000	51
CONELOG® Vario SR abutments, 30° angled, incl. CONELOG® Abutment screw		
Ø 3.8 mm.....	C2562.3800	51
Ø 4.3 mm.....	C2562.4300	51
Ø 5.0 mm.....	C2562.5000	51
CONELOG® Vario SR Lab screws, hex, for CONELOG® Vario SR abutment, straight		
Ø 3.8/4.3 mm, thread M 1.6 mm.....	C4008.1600	53
Ø 5.0 mm, thread M 2.0 mm.....	C4008.2000	53
CT-tube for drill Ø 2.0 mm internal diameter 2.1 mm.....	A2002.2000	13
CT-tube for drill Ø 2.2 mm internal diameter 2.3 mm.....	A2222.2200	13
D		
Depth stop for form drills SCREW-LINE, with reduced coil, resterilizable		
Ø 3.3 mm.....	J5015.3300	18
Ø 3.8 mm.....	J5015.3800	18
Ø 4.3 mm.....	J5015.4300	18
Ø 5.0 mm.....	J5015.5000	18
Depth stop SCREW-LINE for pilot drill (J5051.2000) and pre-drill (J5051.2800) with reduced coil, resterilizable		
L 7 mm.....	J5015.0007	17
L 9 mm.....	J5015.0009	17
L 11 mm.....	J5015.0011	17
L 13 mm.....	J5015.0013	17
Drill extension, ISO shaft L 26.6 mm.....	J5002.0005	32
Drill for CT-tube (for A2002.2000), Ø 2.6 mm.....	A2050.2600	13
(for A2222.2200), Ø 2.8 mm.....	A2050.2800	13
Driver for ball abutment, manual/wrench		
L 18.3 mm.....	J5300.0011	35
Driver for CONELOG® Bar abutment L 18.6 mm.....	C5300.0020	35
Driver for impression post and healing caps for CONELOG® Bar abutment L 19.1 mm.....	C5300.0027	35
Driver for Locator®, manual/wrench, L 24.3 mm.....	J2253.0001	35

INDEX

ALPHABETICAL

Article	Art. No.	Page
Driver		
for screw implants with ISO shaft for angled hand piece..	J5300.0007	32
Driver, long		
for screw implants, manual/wrench, L 27.0 mm.....	J5300.0009	32
Driver, short		
for screw implants, manual/wrench, L 18.0 mm.....	J5300.0008	32

E

Edentulous mandible incl. mounting plate.....	J8070.2050	66
--	------------	----

F

Form drill SCREW-LINE, Cortical bone		
Ø 3.3 mm.....	J5053.3316	19
Ø 3.8 mm.....	J5053.3816	19
Ø 4.3 mm.....	J5053.4316	19
Ø 5.0 mm.....	J5053.5016	19
Form drill SCREW-LINE, with reduced coil		
Ø 3.3 mm, L 9 mm.....	J5052.3309	18
Ø 3.3 mm, L 11 mm.....	J5052.3311	18
Ø 3.3 mm, L 13 mm.....	J5052.3313	18
Ø 3.3 mm, L 16 mm.....	J5052.3316	18
Ø 3.8 mm, L 7 mm.....	J5052.3807	18
Ø 3.8 mm, L 9 mm.....	J5052.3809	18
Ø 3.8 mm, L 11 mm.....	J5052.3811	18
Ø 3.8 mm, L 13 mm.....	J5052.3813	18
Ø 3.8 mm, L 16 mm.....	J5052.3816	18
Ø 4.3 mm, L 7 mm.....	J5052.4307	18
Ø 4.3 mm, L 9 mm.....	J5052.4309	18
Ø 4.3 mm, L 11 mm.....	J5052.4311	18
Ø 4.3 mm, L 13 mm.....	J5052.4313	18
Ø 4.3 mm, L 16 mm.....	J5052.4316	18
Ø 5.0 mm, L 7 mm.....	J5052.5007	18
Ø 5.0 mm, L 9 mm.....	J5052.5009	18
Ø 5.0 mm, L 11 mm.....	J5052.5011	18
Ø 5.0 mm, L 13 mm.....	J5052.5013	18
Ø 5.0 mm, L 16 mm.....	J5052.5016	18

G

Guide System Check-up pin		
Ø 3.3 mm.....	J5301.3300	29
Ø 3.8/4.3 mm.....	J5301.4300	29
Guide System CONELOG® Insertion posts		
Ø 3.3 mm.....	C2026.3300	28
Ø 3.8 mm.....	C2026.3800	28
Ø 4.3 mm.....	C2026.4300	28
Guide System CONELOG® SCREW-LINE Implant, Promote® plus		
Ø 3.3 mm, L 9 mm.....	C1063.3309	24
Ø 3.3 mm, L 11 mm.....	C1063.3311	24
Ø 3.3 mm, L 13 mm.....	C1063.3313	24
Ø 3.3 mm, L 16 mm.....	C1063.3316	24
Ø 3.8 mm, L 7 mm.....	C1063.3807	24
Ø 3.8 mm, L 9 mm.....	C1063.3809	24
Ø 3.8 mm, L 11 mm.....	C1063.3811	24
Ø 3.8 mm, L 13 mm.....	C1063.3813	24

Guide System CONELOG® SCREW-LINE Implant, Promote® plus		
Ø 3.8 mm, L 16 mm.....	C1063.3816	24
Ø 4.3 mm, L 7 mm.....	C1063.4307	24
Ø 4.3 mm, L 9 mm.....	C1063.4309	24
Ø 4.3 mm, L 11 mm.....	C1063.4311	24
Ø 4.3 mm, L 13 mm.....	C1063.4313	24
Ø 4.3 mm, L 16 mm.....	C1063.4316	24
Guide System Driver, manual/wrench		
Ø 3.3/3.8/4.3 mm.....	J5303.4300	29
Guide System Driver, with ISO shaft for angled hand piece		
Ø 3.3/3.8/4.3 mm.....	J5304.4300	29
Guide System Form drill, SCREW-LINE		
Ø 3.3 mm, L 16 mm.....	J5046.3316	25
Ø 3.8 mm, L 16 mm.....	J5046.3816	26
Ø 4.3 mm, L 16 mm.....	J5046.4316	26
Guide System Form drill, SCREW-LINE, Cortical bone		
Ø 3.3 mm, L 9 mm.....	J5048.3309	27
Ø 3.3 mm, L 11 mm.....	J5048.3311	27
Ø 3.3 mm, L 13 mm.....	J5048.3313	27
Ø 3.3 mm, L 16 mm.....	J5048.3316	27
Ø 3.8 mm, L 7 mm.....	J5048.3807	27
Ø 3.8 mm, L 9 mm.....	J5048.3809	27
Ø 3.8 mm, L 11 mm.....	J5048.3811	27
Ø 3.8 mm, L 13 mm.....	J5048.3813	27
Ø 3.8 mm, L 16 mm.....	J5048.3816	27
Ø 4.3 mm, L 7 mm.....	J5048.4307	27
Ø 4.3 mm, L 9 mm.....	J5048.4309	27
Ø 4.3 mm, L 11 mm.....	J5048.4311	27
Ø 4.3 mm, L 13 mm.....	J5048.4313	27
Ø 4.3 mm, L 16 mm.....	J5048.4316	27
Guide System Gingiva Punches, sterile		
Ø 3.3 mm.....	J5041.3300	28
Ø 3.8 mm.....	J5041.3800	28
Ø 4.3 mm.....	J5041.4300	28
Guide System Guiding sleeves		
Ø 3.3 mm.....	J3714.3303	28
Ø 3.8 mm.....	J3714.3803	28
Ø 4.3 mm.....	J3714.4303	28
Guide System Pilot drill set		
Ø 3.3 mm, L 9mm.....	J5043.3309	24
Ø 3.3 mm, L 11 mm.....	J5043.3311	24
Ø 3.3 mm, L 13 mm.....	J5043.3313	24
Ø 3.8/4.3 mm, L 7 mm.....	J5043.4307	24
Ø 3.8/4.3 mm, L 9 mm.....	J5043.4309	24
Ø 3.8/4.3 mm, L 11 mm.....	J5043.4311	25
Ø 3.8/4.3 mm, L 13 mm.....	J5043.4313	25
Guide System Pilot drill		
Ø 3.3 mm, L 16 mm.....	J5044.3316	24
Ø 3.8/4.3 mm, L 16 mm.....	J5044.4316	25
Guide System Seating tool		
Ø 3.3 mm.....	J3716.3300	29
Ø 3.8/4.3 mm.....	J3716.4300	29
Guide System Surgery set, SCREW-LINE		
Ø 3.3 mm, L 9 mm.....	J5045.3309	25
Ø 3.3 mm, L 11 mm.....	J5045.3311	25
Ø 3.3 mm, L 13 mm.....	J5045.3313	25
Ø 3.8 mm, L 7 mm.....	J5045.3807	26
Ø 3.8 mm, L 9 mm.....	J5045.3809	26
Ø 3.8 mm, L 11 mm.....	J5045.3811	26
Ø 3.8 mm, L 13 mm.....	J5045.3813	26
Ø 4.3 mm, L 7 mm.....	J5045.4307	26
Ø 4.3 mm, L 9 mm.....	J5045.4309	26
Ø 4.3 mm, L 11 mm.....	J5045.4311	26
Ø 4.3 mm, L 13 mm.....	J5045.4313	26

INDEX

ALPHABETICAL

Article	Art. No.	Page
Guide System Template drill		
Ø 3.3 mm	J3713.3300	29
Ø 3.8/4.3 mm	J3713.4300	29
H		
Healing cap for CONELOG® Bar abutment		
Ø 3.3/3.8/4.3/5.0 mm	C2030.4300	54
Holding key for insertion post	J5302.0010	33
Holding pin for CONELOG® Bar abutment/ CONELOG® Bar lab analog		
Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm	C2256.1600	56
Holding sleeve for screw implants		
Ø 3.3 mm	J5302.3300	33
Ø 3.8 mm	J5302.3800	33
Ø 4.3 mm	J5302.4300	33
I		
IMPLANT PROSTHETICS, DVD compendium	B2012.0100	68
Impression caps for Impression posts, (5 units)		
Ø 3.3 mm	J2111.3300	44
Ø 3.8 mm	J2111.3800	44
Ø 4.3 mm	J2111.4300	44
Ø 5.0 mm	J2111.5000	44
Impression post for CONELOG® Bar abutment		
Ø 3.3/3.8/4.3/5.0 mm	C2130.4300	54
L		
Lamella retention insert, for matrix CM Dalbo®-Plus		
Ø 3.3/3.8/4.3/5.0 mm	J2250.0007	57
Locator® Analog		
Ø 3.3/3.8/4.3/5.0 mm	J2253.0340	58
Locator® Angle measurement guide	J2253.0003	35
Locator® Block out spacer		
Ø 3.3/3.8/4.3/5.0 mm	J2253.0401	59
Locator® Impression cap		
Ø 3.3/3.8/4.3/5.0 mm	J2253.0200	58
Locator® Instrument, threepart		
L 83 mm	J2253.0002	35
Locator® Male processing packages		
Ø 3.3/3.8/4.3/5.0 mm	J2253.0102	59
Locator® Male processing packages for extended range		
Ø 3.8/4.3/5.0 mm	J2253.0112	59
Locator® Parallel post	J2253.0004	35
Locator® Processing replacement male		
Ø 3.3/3.8/4.3/5.0 mm	J2253.0402	59
Locator® Replacement male for extended range, gray		
Ø 3.8/4.3/5.0 mm	J2253.2000	60

Article	Art. No.	Page
Locator® Replacement male for extended range, green		
Ø 3.8/4.3/5.0 mm	J2253.2004	60
Locator® Replacement male for extended range, orange		
Ø 3.8/4.3/5.0 mm	J2253.2003	60
Locator® Replacement male for extended range, red		
Ø 3.8/4.3/5.0 mm	J2253.2002	60
Locator® Replacement male, blue		
Ø 3.3/3.8/4.3/5.0 mm	J2253.1002	60
Locator® Replacement male, clear		
Ø 3.3/3.8/4.3/5.0 mm	J2253.1005	60
Locator® Replacement male, pink		
Ø 3.3/3.8/4.3/5.0 mm	J2253.1003	60
Logfit® Analogs		
Ø 3.8/4.3 mm	J2552.4300	47
Ø 5.0 mm	J2552.6000	47
Logfit® Impression caps		
Ø 3.8/4.3 mm	J2551.4300	47
Ø 5.0 mm	J2551.6000	47
Logfit® Plastic copings, for bridges, burn-out		
Ø 3.8/4.3 mm	J2553.4301	48
Ø 5.0 mm	J2553.6001	48
Logfit® Plastic copings, for crowns, burn-out		
Ø 3.8/4.3 mm	J2553.4302	48
Ø 5.0 mm	J2553.6002	48
M		
Matrix CM Dalbo®-Plus, for ball abutment, incl. lamella retention insert		
Ø 3.3/3.8/4.3/5.0 mm	J2250.0005	57
O		
Osteotome SCREW-LINE, angled concave		
Ø 3.3 mm	J5420.3310	23
Ø 3.8 mm	J5420.3810	23
Ø 4.3 mm	J5420.4310	23
Ø 5.0 mm	J5420.5010	23
Osteotome SCREW-LINE, angled convex		
Ø 3.3 mm	J5418.3310	21
Ø 3.8 mm	J5418.3810	21
Ø 4.3 mm	J5418.4310	21
Ø 5.0 mm	J5418.5010	21
Osteotome SCREW-LINE, straight concave		
Ø 3.3 mm	J5420.3300	22
Ø 3.8 mm	J5420.3800	22
Ø 4.3 mm	J5420.4300	22
Ø 5.0 mm	J5420.5000	22
Osteotome SCREW-LINE, straight convex		
Ø 3.3 mm	J5418.3300	20
Ø 3.8 mm	J5418.3800	20
Ø 4.3 mm	J5418.4300	20
Ø 5.0 mm	J5418.5000	20
Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE		
angled concave	J5420.0030	23
angled convex	J5418.0030	21
straight concave	J5420.0020	22
straight convex	J5418.0020	20

Article Art. No. Page

P

Paralleling pin		
SCREW-LINE		
Ø 1.7-2.8/2.0 mm	J5300.2028	32
PickUp instrument	J5300.0030	33
Pilot drill SCREW-LINE		
reduced coil, resterilizable		
Ø 2.0 mm	J5051.2000	17
Pilot drill without coil, resterilizable		
Ø 2.0 mm	J5051.2003	17
Pre-drill SCREW-LINE		
Ø 1.7-2.8 mm	J5051.2800	17
Pre-Osteotome SCREW-LINE , straight concave		
Ø 1.7-2.8 mm	J5419.2800	22, 23
Pre-Osteotome SCREW-LINE , straight convex		
Ø 1.7-2.8 mm	J5417.2800	20, 21
Prosthetic screw, for bar abutments, hex , (also for Passive-Fit)		
Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm	J4005.1602	56
Prosthetic set	J5330.8600	34
Prosthetic tray (without content)	J5330.8500	34

R

Reworking reamer, for base for bar abutment , plane surface/cone seat		
Ø 3.3/3.8/4.3/5.0 mm	J3711.0010	62
Reworking reamer, for base for bar abutment , screw seat		
Ø 3.3/3.8/4.3/5.0 mm	J3711.0020	62
Round bur , resterilizable		
Ø 2.3 mm	J5050.2300	17
Ø 3.5 mm	J5050.3500	17

S

Screw, hex, for bar abutment , screw for bases for bar abutments for impression taking, open tray and soldering		
Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm	J4005.1610	54
Screwdriver Activator , for ball abutment matrix CM Dalbo®-Plus	J5315.0005	35
Screwdriver hex , long, ISO shaft	J5316.0503	34
Screwdriver hex , long, manual/wrench	J5316.0502	34
Screwdriver hex , extra short, manual/wrench	J5316.0510	34
Screwdriver hex , short, ISO shaft	J5316.0504	34
Screwdriver hex , short, manual/wrench	J5316.0501	34
Sleeve for titanium bonding base , burn-out, Passive-Fit		
Ø 3.3/3.8/4.3/5.0 mm	C2261.3300	56
Soldering aid/bar-lab analog for CONELOG® Bar abutment		
Ø 3.3/3.8/4.3/5.0 mm	C3020.4300	54
Surgery Set CAMLOG®/CONELOG® SCREW-LINE	J5300.0057	16

Article Art. No. Page

T

Tap adapter for tap SCREW-LINE		
short L 18.0 mm	J5322.0010	32
long L 23.0 mm	J5322.0011	32
Tap SCREW-LINE , with hexagon		
Ø 3.3 mm	J5054.3309	19
Ø 3.8 mm	J5054.3809	19
Ø 4.3 mm	J5054.4309	19
Ø 5.0 mm	J5054.5009	19
Titanium bonding base for CONELOG® Bar abutment , Passive-Fit		
Ø 3.3/3.8/4.3/5.0 mm	C2260.3300	55
Torque wrench	J5320.1030	34

U

Universal holder	J3709.0015	62
-------------------------------	------------	----

V

Vario SR analog		
Ø 3.8/4.3 mm	J2567.4300	51
Ø 5.0 mm	J2567.6000	51
Vario SR aligning tool 20° , for insertion post		
Ø 3.8/4.3/5.0 mm	J2569.0001	53
Vario SR aligning tool 30° , for insertion post		
Ø 3.8/4.3/5.0 mm	J2569.0002	53
Vario SR base for bar, laser-weldable , incl. Vario SR prosthetic screw		
Ø 3.8/4.3 mm	J2570.4300	52
Ø 5.0 mm	J2570.6000	52
Vario SR impression cap, closed tray		
Ø 3.8/4.3 mm	J2565.4300	51
Ø 5.0 mm	J2565.6000	51
Vario SR impression cap, open tray , incl. fixing screw		
Ø 3.8/4.3 mm	J2566.4300	51
Ø 5.0 mm	J2566.6000	51
Vario SR plastic coping, bridge, burn-out		
Ø 3.8/4.3 mm	J2563.4301	52
Ø 5.0 mm	J2563.6001	52
Vario SR plastic coping, crown , with triple-surface antirotation, burn-out		
Ø 3.8/4.3 mm	J2563.4302	52
Ø 5.0 mm	J2563.6002	52
Vario SR plastic coping, crown , with single-surface antirotation, for angled Vario SR abutments, burn-out		
Ø 3.8/4.3 mm	J2563.4303	52
Ø 5.0 mm	J2563.6003	52
Vario SR protection cap		
Ø 3.8/4.3 mm	J2568.4300	52
Ø 5.0 mm	J2568.6000	52

INDEX

ALPHABETICAL

Article	Art. No.	Page
Vario SR prosthetic screw, hex		
Ø 3.8/4.3/5.0 mm, thread M 2.0 mm	J4005.2004	53
Vario SR titanium cap, bridge,		
incl. Vario SR prosthetic screw		
Ø 3.8/4.3 mm	J2564.4301	52
Ø 5.0 mm	J2564.6001	52

X

X-Ray Planning foil 1.25:1,		
for CONELOG® SCREW-LINE Implants,		
Magnification 25%	C5300.9010	12
X-Ray Planning foil 1.4:1,		
for CONELOG® SCREW-LINE Implants,		
Magnification 40%	C5300.9011	12
X-Ray Transfer pictures 1.25:1,		
for CONELOG® SCREW-LINE Implants,		
Planning foils, self-adhesive, Magnification 25%		
Ø 3.3 mm	C5300.9080	12
Ø 3.8 mm	C5300.9081	12
Ø 4.3 mm	C5300.9082	12
Ø 5.0 mm	C5300.9083	12

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page	Art. No.	Article	Page
	CT-tube for drill Ø 2.0 mm			CONELOG® Healing cap, cylindrical	
A2002.2000	internal diameter 2.1 mm	13	C2015.3320	Ø 3.3 mm, GH 2.0 mm	30
	Drill for CT-tube		C2015.3340	Ø 3.3 mm, GH 4.0 mm	30
A2050.2600	(for A2002.2000), Ø 2.6 mm	13	C2015.3820	Ø 3.8 mm, GH 2.0 mm	30
A2050.2800	(for A2222.2200), Ø 2.8 mm	13	C2015.3840	Ø 3.8 mm, GH 4.0 mm	30
	CT-tube for drill Ø 2.2 mm		C2015.3860	Ø 3.8 mm, GH 6.0 mm	30
A2222.2200	internal diameter 2.3 mm	13	C2015.4320	Ø 4.3 mm, GH 2.0 mm	30
			C2015.4340	Ø 4.3 mm, GH 4.0 mm	30
B2012.0100	IMPLANT PROSTHETICS, DVD compendium	68	C2015.4360	Ø 4.3 mm, GH 6.0 mm	30
			C2015.5020	Ø 5.0 mm, GH 2.0 mm	30
	Guide System CONELOG® SCREW-LINE Implant, Promote® plus		C2015.5040	Ø 5.0 mm, GH 4.0 mm	30
C1063.3309	Ø 3.3 mm, L 9 mm	24	C2015.5060	Ø 5.0 mm, GH 6.0 mm	30
C1063.3311	Ø 3.3 mm, L 11 mm	24		Guide System CONELOG® Insertion posts	
C1063.3313	Ø 3.3 mm, L 13 mm	24	C2026.3300	Ø 3.3 mm	28
C1063.3316	Ø 3.3 mm, L 16 mm	24	C2026.3800	Ø 3.8 mm	28
C1063.3807	Ø 3.8 mm, L 7 mm	24	C2026.4300	Ø 4.3 mm	28
C1063.3809	Ø 3.8 mm, L 9 mm	24		Healing cap for CONELOG® Bar abutment	
C1063.3811	Ø 3.8 mm, L 11 mm	24	C2030.4300	Ø 3.3/3.8/4.3/5.0 mm	54
C1063.3813	Ø 3.8 mm, L 13 mm	24		CONELOG® Impression posts, closed tray	
C1063.3816	Ø 3.8 mm, L 16 mm	24	C2110.3300	Ø 3.3 mm	44
C1063.4307	Ø 4.3 mm, L 7 mm	24	C2110.3800	Ø 3.8 mm	44
C1063.4309	Ø 4.3 mm, L 9 mm	24	C2110.4300	Ø 4.3 mm	44
C1063.4311	Ø 4.3 mm, L 11 mm	24	C2110.5000	Ø 5.0 mm	44
C1063.4313	Ø 4.3 mm, L 13 mm	24		CONELOG® Impression posts, open tray	
C1063.4316	Ø 4.3 mm, L 16 mm	24	C2121.3300	Ø 3.3 mm	44
	CONELOG® SCREW-LINE Implant, Promote® plus		C2121.3800	Ø 3.8 mm	44
C1062.3309	Ø 3.3 mm, L 9 mm	15	C2121.4300	Ø 4.3 mm	44
C1062.3311	Ø 3.3 mm, L 11 mm	15	C2121.5000	Ø 5.0 mm	44
C1062.3313	Ø 3.3 mm, L 13 mm	15		Impression post for CONELOG® Bar abutment	
C1062.3316	Ø 3.3 mm, L 16 mm	15	C2130.4300	Ø 3.3/3.8/4.3/5.0 mm	54
C1062.3807	Ø 3.8 mm, L 7 mm	15		CONELOG® Bite registration posts	
C1062.3809	Ø 3.8 mm, L 9 mm	15	C2140.3300	Ø 3.3 mm	44
C1062.3811	Ø 3.8 mm, L 11 mm	15	C2140.3800	Ø 3.8 mm	44
C1062.3813	Ø 3.8 mm, L 13 mm	15	C2140.4300	Ø 4.3 mm	44
C1062.3816	Ø 3.8 mm, L 16 mm	15	C2140.5000	Ø 5.0 mm	44
C1062.4307	Ø 4.3 mm, L 7 mm	15		CONELOG® Universal abutments,	
C1062.4309	Ø 4.3 mm, L 9 mm	15		preparable, incl. CONELOG® Abutment screw	
C1062.4311	Ø 4.3 mm, L 11 mm	15	C2211.3300	Ø 3.3 mm	47
C1062.4313	Ø 4.3 mm, L 13 mm	15	C2211.3800	Ø 3.8 mm	47, 61
C1062.4316	Ø 4.3 mm, L 16 mm	15	C2211.4300	Ø 4.3 mm	47, 61
C1062.5007	Ø 5.0 mm, L 7 mm	15	C2211.5000	Ø 5.0 mm	47, 61
C1062.5009	Ø 5.0 mm, L 9 mm	15		CONELOG® Telescope abutments,	
C1062.5011	Ø 5.0 mm, L 11 mm	15		preparable, incl. CONELOG® Abutment screw	
C1062.5013	Ø 5.0 mm, L 13 mm	15	C2212.3800	Ø 3.8 mm	61
C1062.5016	Ø 5.0 mm, L 16 mm	15	C2212.4300	Ø 4.3 mm	61
	CONELOG® SCREW-LINE Implant for practice		C2212.5000	Ø 5.0 mm	61
C1069.3813	Ø 3.8 mm	66		CONELOG® Esthomic® Abutments, straight	
C1069.4313-01	Ø 4.3 mm	66	C2226.3815	Ø 3.8 mm, GH 1.5-2.5 mm	45
	CONELOG® Healing cap, bottleneck		C2226.3830	Ø 3.8 mm, GH 3.0-4.5 mm	45
C2011.3340	Ø 3.3 mm, GH 4.0 mm	30	C2226.4315	Ø 4.3 mm, GH 1.5-2.5 mm	45
C2011.3840	Ø 3.8 mm, GH 4.0 mm	30	C2226.4330	Ø 4.3 mm, GH 3.0-4.5 mm	45
C2011.3860	Ø 3.8 mm, GH 6.0 mm	30	C2226.5015	Ø 5.0 mm, GH 1.5-2.5 mm	45
C2011.4340	Ø 4.3 mm, GH 4.0 mm	30	C2226.5030	Ø 5.0 mm, GH 3.0-4.5 mm	45
C2011.4360	Ø 4.3 mm, GH 6.0 mm	30		CONELOG® Esthomic® Abutments,	
C2011.5040	Ø 5.0 mm, GH 4.0 mm	30		15° angled, type A	
C2011.5060	Ø 5.0 mm, GH 6.0 mm	30	C2227.3815	Ø 3.8 mm, GH 1.5-2.5 mm	45
	CONELOG® Healing cap, wide body		C2227.3830	Ø 3.8 mm, GH 3.0-4.5 mm	45
C2014.3340	Ø 3.3 mm, GH 4.0 mm	30	C2227.4315	Ø 4.3 mm, GH 1.5-2.5 mm	45
C2014.3840	Ø 3.8 mm, GH 4.0 mm	30	C2227.4330	Ø 4.3 mm, GH 3.0-4.5 mm	45
C2014.3860	Ø 3.8 mm, GH 6.0 mm	30	C2227.5015	Ø 5.0 mm, GH 1.5-2.5 mm	45
C2014.4340	Ø 4.3 mm, GH 4.0 mm	30	C2227.5030	Ø 5.0 mm, GH 3.0-4.5 mm	45
C2014.4360	Ø 4.3 mm, GH 6.0 mm	30		CONELOG® Esthomic® Abutments,	
C2014.5040	Ø 5.0 mm, GH 4.0 mm	30		15° angled, type B	
C2014.5060	Ø 5.0 mm, GH 6.0 mm	30	C2228.3815	Ø 3.8 mm, GH 1.5-2.5 mm	46
			C2228.3830	Ø 3.8 mm, GH 3.0-4.5 mm	46

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page
	CONELOG® Esthomic® Abutments, 15° angled, type B	
C2228.4315	Ø 4.3 mm, GH 1.5-2.5 mm	46
C2228.4330	Ø 4.3 mm, GH 3.0-4.5 mm	46
C2228.5015	Ø 5.0 mm, GH 1.5-2.5 mm	46
C2228.5030	Ø 5.0 mm, GH 3.0-4.5 mm	46
	CONELOG® Esthomic® Abutments, 20° angled, type A	
C2231.3815	Ø 3.8 mm, GH 1.5-2.5 mm	46
C2231.3830	Ø 3.8 mm, GH 3.0-4.5 mm	46
C2231.4315	Ø 4.3 mm, GH 1.5-2.5 mm	46
C2231.4330	Ø 4.3 mm, GH 3.0-4.5 mm	46
C2231.5015	Ø 5.0 mm, GH 1.5-2.5 mm	46
C2231.5030	Ø 5.0 mm, GH 3.0-4.5 mm	46
	CONELOG® Esthomic® Abutments, 20° angled, type B	
C2232.3815	Ø 3.8 mm, GH 1.5-2.5 mm	46
C2232.3830	Ø 3.8 mm, GH 3.0-4.5 mm	46
C2232.4315	Ø 4.3 mm, GH 1.5-2.5 mm	46
C2232.4330	Ø 4.3 mm, GH 3.0-4.5 mm	46
C2232.5015	Ø 5.0 mm, GH 1.5-2.5 mm	46
C2232.5030	Ø 5.0 mm, GH 3.0-4.5 mm	46
	CONELOG® Esthomic® Abutments, Inset	
C2235.3320	Ø 3.3 mm	46
C2235.3820	Ø 3.8 mm	46
C2235.4320	Ø 4.3 mm	46
C2235.5020	Ø 5.0 mm	46
	CONELOG® Temporary abutments	
C2239.3300	Ø 3.3 mm	45
C2239.3800	Ø 3.8 mm	45
C2239.4300	Ø 4.3 mm	45
C2239.5000	Ø 5.0 mm	45
	CONELOG® Modeling aids for CONELOG® Titanium base CAD/CAM, burn-out	
C2242.3302	Ø 3.3 mm	49
C2242.3802	Ø 3.8 mm	49
C2242.4302	Ø 4.3 mm	49
C2242.5002	Ø 5.0 mm	49
	CONELOG® Titanium bases CAD/CAM	
C2242.3308	Ø 3.3 mm, GH 0.8 mm	49
C2242.3320	Ø 3.3 mm, GH 2.0 mm	49
C2242.3808	Ø 3.8 mm, GH 0.8 mm	49
C2242.3820	Ø 3.8 mm, GH 2.0 mm	49
C2242.4308	Ø 4.3 mm, GH 0.8 mm	49
C2242.4320	Ø 4.3 mm, GH 2.0 mm	49
C2242.5008	Ø 5.0 mm, GH 0.8 mm	49
C2242.5020	Ø 5.0 mm, GH 2.0 mm	49
	CONELOG® Modeling aids for CONELOG® Titanium base CAD/CAM, burn-out	
C2244.3302	Ø 3.3 mm	49
C2244.3802	Ø 3.8 mm	49
C2244.4302	Ø 4.3 mm	49
C2244.5002	Ø 5.0 mm	49
	CONELOG® Titanium bases CAD/CAM	
C2244.3308	Ø 3.3 mm, GH 0.8 mm	49
C2244.3320	Ø 3.3 mm, GH 2.0 mm	49
C2244.3808	Ø 3.8 mm, GH 0.8 mm	49
C2244.3820	Ø 3.8 mm, GH 2.0 mm	49
C2244.4308	Ø 4.3 mm, GH 0.8 mm	49
C2244.4320	Ø 4.3 mm, GH 2.0 mm	49
C2244.5008	Ø 5.0 mm, GH 0.8 mm	49
C2244.5020	Ø 5.0 mm, GH 2.0 mm	49
	CONELOG® Gold-plastic abutments	
C2246.3300	Ø 3.3 mm	47
C2246.3800	Ø 3.8 mm	47
C2246.4300	Ø 4.3 mm	47
C2246.5000	Ø 5.0 mm	47

Art. No.	Article	Page
	CONELOG® Ball abutments, male part, incl. stabilizing ring	
C2249.3315	Ø 3.3 mm, GH 1.5 mm	57
C2249.3330	Ø 3.3 mm, GH 3.0 mm	57
C2249.3815	Ø 3.8 mm, GH 1.5 mm	57
C2249.3830	Ø 3.8 mm, GH 3.0 mm	57
C2249.3845	Ø 3.8 mm, GH 4.5 mm	57
C2249.4315	Ø 4.3 mm, GH 1.5 mm	57
C2249.4330	Ø 4.3 mm, GH 3.0 mm	57
C2249.4345	Ø 4.3 mm, GH 4.5 mm	57
C2249.5015	Ø 5.0 mm, GH 1.5 mm	57
C2249.5030	Ø 5.0 mm, GH 3.0 mm	57
C2249.5045	Ø 5.0 mm, GH 4.5 mm	57
	CONELOG® Ball abutment sets, incl. male part and matrix CM Dalbo®-Plus	
C2250.3315	Ø 3.3 mm, GH 1.5 mm	56
C2250.3330	Ø 3.3 mm, GH 3.0 mm	56
C2250.3815	Ø 3.8 mm, GH 1.5 mm	56
C2250.3830	Ø 3.8 mm, GH 3.0 mm	56
C2250.3845	Ø 3.8 mm, GH 4.5 mm	56
C2250.4315	Ø 4.3 mm, GH 1.5 mm	56
C2250.4330	Ø 4.3 mm, GH 3.0 mm	56
C2250.4345	Ø 4.3 mm, GH 4.5 mm	56
C2250.5015	Ø 5.0 mm, GH 1.5 mm	56
C2250.5030	Ø 5.0 mm, GH 3.0 mm	56
C2250.5045	Ø 5.0 mm, GH 4.5 mm	56
	CONELOG® Locator® Abutments	
C2253.3310	Ø 3.3 mm, GH 1.0 mm	58
C2253.3320	Ø 3.3 mm, GH 2.0 mm	58
C2253.3330	Ø 3.3 mm, GH 3.0 mm	58
C2253.3340	Ø 3.3 mm, GH 4.0 mm	58
C2253.3810	Ø 3.8 mm, GH 1.0 mm	58
C2253.3820	Ø 3.8 mm, GH 2.0 mm	58
C2253.3830	Ø 3.8 mm, GH 3.0 mm	58
C2253.3840	Ø 3.8 mm, GH 4.0 mm	58
C2253.3850	Ø 3.8 mm, GH 5.0 mm	58
C2253.4310	Ø 4.3 mm, GH 1.0 mm	58
C2253.4320	Ø 4.3 mm, GH 2.0 mm	58
C2253.4330	Ø 4.3 mm, GH 3.0 mm	58
C2253.4340	Ø 4.3 mm, GH 4.0 mm	58
C2253.4350	Ø 4.3 mm, GH 5.0 mm	58
C2253.5010	Ø 5.0 mm, GH 1.0 mm	58
C2253.5020	Ø 5.0 mm, GH 2.0 mm	58
C2253.5030	Ø 5.0 mm, GH 3.0 mm	58
C2253.5040	Ø 5.0 mm, GH 4.0 mm	58
C2253.5050	Ø 5.0 mm, GH 5.0 mm	58
	CONELOG® Bar Abutments	
C2255.3310	Ø 3.3 mm, GH 1.0 mm	54
C2255.3325	Ø 3.3 mm, GH 2.5 mm	54
C2255.3810	Ø 3.8 mm, GH 1.0 mm	54
C2255.3825	Ø 3.8 mm, GH 2.5 mm	54
C2255.3840	Ø 3.8 mm, GH 4.0 mm	54
C2255.4310	Ø 4.3 mm, GH 1.0 mm	54
C2255.4325	Ø 4.3 mm, GH 2.5 mm	54
C2255.4340	Ø 4.3 mm, GH 4.0 mm	54
C2255.5010	Ø 5.0 mm, GH 1.0 mm	54
C2255.5025	Ø 5.0 mm, GH 2.5 mm	54
C2255.5040	Ø 5.0 mm, GH 4.0 mm	54
	Holding pin for CONELOG® Bar abutment/ CONELOG® Bar lab analog	
C2256.1600	Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm	56
	Base for CONELOG® Bar abutment, burn-out	
C2257.3300	Ø 3.3/3.8/4.3/5.0 mm	55
	Base for CONELOG® Bar abutment, solderable	
C2258.4300	Ø 3.3/3.8/4.3/5.0 mm	55

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page	Art. No.	Article	Page
	Titanium bonding base for CONELOG® Bar abutment, Passive-Fit			CONELOG® Abutment screws, hex	
C2260.3300	Ø 3.3/3.8/4.3/5.0 mm	55	C4005.1601	Ø 3.3/3.8/4.3 mm, thread M 1.6 mm.....	48, 50, 53, 61
	Sleeve for titanium bonding base, burn-out, Passive-Fit		C4005.2001	Ø 5.0 mm, thread M 2.0 mm	48, 50, 53, 61
C2261.3300	Ø 3.3/3.8/4.3/5.0 mm	56		CONELOG® Lab screws, hex, brown anodized	
	Base for CONELOG® Bar abutment, laser-weldable		C4006.1601	Ø 3.3/3.8/4.3 mm, thread M 1.6 mm.....	48, 50, 53, 61
C2262.4300	Ø 3.3/3.8/4.3/5.0 mm	55	C4006.2001	Ø 5.0 mm, thread M 2.0 mm	48, 50, 53, 61
	Base for CONELOG® Bar abutment, cast-on			CONELOG® Vario SR abutment screws, hex, for CONELOG® Vario SR abutment, straight	
C2263.4300	Ø 3.3/3.8/4.3/5.0 mm	55	C4007.1600	Ø 3.8/4.3 mm, thread M 1.6 mm	53
	CONELOG® Logfit® Abutments, incl. CONELOG® Abutment screw		C4007.2000	Ø 5.0 mm, thread M 2.0 mm	53
C2550.3810	Ø 3.8 mm, GH 1.0 mm	47		CONELOG® Vario SR lab screws, hex, for CONELOG® Vario SR abutment, straight	
C2550.3825	Ø 3.8 mm, GH 2.5 mm	47	C4008.1600	Ø 3.8/4.3 mm, thread M 1.6 mm	53
C2550.4310	Ø 4.3 mm, GH 1.0 mm	47	C4008.2000	Ø 5.0 mm, thread M 2.0 mm	53
C2550.4325	Ø 4.3 mm, GH 2.5 mm	47		CONELOG® Abutment screws for Titanium base CAD/CAM, hex, dark purple anodized	
C2550.5010	Ø 5.0 mm, GH 1.0 mm	47	C4015.1601	Ø 3.3/3.8/4.3 mm, thread M 1.6 mm.....	50
C2550.5025	Ø 5.0 mm, GH 2.5 mm	47	C4015.2001	Ø 5.0 mm, thread M 2.0 mm	50
	CONELOG® Vario SR abutments, straight, incl. CONELOG® Vario SR abutment screw			CONELOG® Lab screws for Titanium base CAD/CAM, hex	
C2560.3808	Ø 3.8 mm	51	C4016.1601	Ø 3.3/3.8/4.3 mm, thread M 1.6 mm.....	50
C2560.4308	Ø 4.3 mm	51	C4016.2001	Ø 5.0 mm, thread M 2.0 mm	50
C2560.5008	Ø 5.0 mm	51		Driver for CONELOG® Bar abutment	
	CONELOG® Vario SR abutments, 20° angled, incl. CONELOG® Abutment screw		C5300.0020	L 18.6 mm	35
C2561.3800	Ø 3.8 mm	51		Driver for impression post and healing caps for CONELOG® Bar abutment	
C2561.4300	Ø 4.3 mm	51	C5300.0027	L 19.1 mm	35
C2561.5000	Ø 5.0 mm	51		CONELOG® Disconnectors for CONELOG® Abutments	
	CONELOG® Vario SR abutments, 30° angled, incl. CONELOG® Abutment screw		C5300.1601	Ø 3.3/3.8/4.3 mm, thread M 1.6 mm.....	34
C2562.3800	Ø 3.8 mm	51	C5300.2001	Ø 5.0 mm, thread M 2.0 mm	34
C2562.4300	Ø 4.3 mm	51		X-Ray Planning foil 1.25:1, for CONELOG® SCREW-LINE Implants, Magnification 25%.....	12
C2562.5000	Ø 5.0 mm	51	C5300.9010		
	CONELOG® Scanbodies, incl. CONELOG® Abutment screw, sterile			X-Ray Planungsfolie 1.4:1, for CONELOG® SCREW-LINE Implants, Magnification 40%	12
C2600.3310	Ø 3.3 mm	50	C5300.9011		
C2600.4310	Ø 3.8/4.3 mm	50		X-Ray Transfer pictures 1.25:1, Planning foils, self-adhesive, for CONELOG® SCREW-LINE Implants, Magnification 25%	
C2600.5010	Ø 5.0 mm	50	C5300.9080	Ø 3.3 mm	12
	CONELOG® ScanPosts for Sirona Scanbody, incl. CONELOG® Abutment screw		C5300.9081	Ø 3.8 mm	12
C2620.3306	Ø 3.3 mm	50	C5300.9082	Ø 4.3 mm	12
C2620.3806	Ø 3.8 mm	50	C5300.9083	Ø 5.0 mm	12
C2620.4306	Ø 4.3 mm	50		Adapter for screw implants, long, for CONELOG® SCREW-LINE Implants	
C2620.5006	Ø 5.0 mm	50	C5302.3310	Ø 3.3 mm	33
	CONELOG® Lab analogs		C5302.4310	Ø 3.8/4.3 mm	33
C3010.3300	Ø 3.3 mm	45		CONELOG® Macro model	
C3010.3800	Ø 3.8 mm	45	C8010.1010	Scale 3:1	66
C3010.4300	Ø 4.3 mm	45		CONELOG® Abutment selection kit.....	63
C3010.5000	Ø 5.0 mm	45		CONELOG® Demonstration model, acrylic glass, lower jaw, 4 CONELOG® SCREW-LINE Implants	
	Ball abutment analogs, incl. stabilizing ring		C8050.1040	Ø 4.3 mm	66
C3015.3300	Ø 3.3/3.8/4.3 mm	57		CONELOG® Demonstration model, acrylic glass, upper jaw, 4 CONELOG® SCREW-LINE Implants	
C3015.5000	Ø 5.0 mm	57	C8070.1020	Ø 4.3 mm	66
	Soldering aid/bar-lab analog for CONELOG® Bar abutment				
C3020.4300	Ø 3.3/3.8/4.3/5.0 mm	54			
	CONELOG® Universal holder, incl. 2 CONELOG® Lab screws, hex, and CONELOG® Abutment collets				
C3709.0010	Ø 3.3/3.8/4.3/5.0 mm	62			
	CONELOG® Abutment collets, for universal holder				
C3709.3300	Ø 3.3 mm	62			
C3709.3800	Ø 3.8 mm	62			
C3709.4300	Ø 4.3 mm	62			
C3709.5000	Ø 5.0 mm	62			

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page
	Impression caps for Impression posts, (5 units)	
J2111.3300	Ø 3.3 mm	44
J2111.3800	Ø 3.8 mm	44
J2111.4300	Ø 4.3 mm	44
J2111.5000	Ø 5.0 mm	44
	Bite registration caps (5 units)	
J2112.3300	Ø 3.3 mm	44
J2112.3800	Ø 3.8 mm	44
J2112.4300	Ø 4.3 mm	44
J2112.5000	Ø 5.0 mm	44
	Matrix CM Dalbo®-Plus, for ball abutment, incl. lamella retention insert	
J2250.0005	Ø 3.3/3.8/4.3/5.0 mm	57
	Lamella retention insert, for matrix CM Dalbo®-Plus	
J2250.0007	Ø 3.3/3.8/4.3/5.0 mm	57
	Driver for Locator®, manual/wrench, L 24.3 mm	
J2253.0001		35
	Locator® Instrument, threepart L 83 mm	
J2253.0002		35
J2253.0003	Locator® Angle measurement guide	35
J2253.0004	Locator® Parallel post	35
	Locator® Impression cap	
J2253.0200	Ø 3.3/3.8/4.3/5.0 mm	58
	Locator® Analog	
J2253.0340	Ø 3.3/3.8/4.3/5.0 mm	58
	Locator® Male processing packages	
J2253.0102	Ø 3.3/3.8/4.3/5.0 mm	59
	Locator® Male processing packages for extended range	
J2253.0112	Ø 3.8/4.3/5.0 mm	59
	Locator® Block out spacer	
J2253.0401	Ø 3.3/3.8/4.3/5.0 mm	59
	Locator® Processing replacement male	
J2253.0402	Ø 3.3/3.8/4.3/5.0 mm	59
	Locator® Replacement male, blue	
J2253.1002	Ø 3.3/3.8/4.3/5.0 mm	60
	Locator® Replacement male, pink	
J2253.1003	Ø 3.3/3.8/4.3/5.0 mm	60
	Locator® Replacement male, clear	
J2253.1005	Ø 3.3/3.8/4.3/5.0 mm	60
	Locator® Replacement male for extended range, red	
J2253.2002	Ø 3.8/4.3/5.0 mm	60
	Locator® Replacement male for extended range, orange	
J2253.2003	Ø 3.8/4.3/5.0 mm	60
	Locator® Replacement male for extended range, green	
J2253.2004	Ø 3.8/4.3/5.0 mm	60
	Locator® Replacement male for extended range, gray	
J2253.2000	Ø 3.8/4.3/5.0 mm	60
	Logfit® Impression caps	
J2551.4300	Ø 3.8/4.3 mm	47
J2551.6000	Ø 5.0 mm	47
	Logfit® Analogs	
J2552.4300	Ø 3.8/4.3 mm	47
J2552.6000	Ø 5.0 mm	47
	Logfit® Plastic copings, for crowns, burn-out	
J2553.4302	Ø 3.8/4.3 mm	48
J2553.6002	Ø 5.0 mm	48
	Logfit® Plastic copings, for bridges, burn-out	
J2553.4301	Ø 3.8/4.3 mm	48
J2553.6001	Ø 5.0 mm	48

Art. No.	Article	Page
	Vario SR plastic coping, bridge, burn-out	
J2563.4301	Ø 3.8/4.3 mm	52
	Vario SR plastic coping, crown, with triple-surface antirotation, burn-out	
J2563.4302	Ø 3.8/4.3 mm	52
	Vario SR plastic coping, crown, with single-surface antirotation, for angled Vario SR abutments, burn-out	
J2563.4303	Ø 3.8/4.3 mm	52
	Vario SR plastic coping, bridge, burn-out	
J2563.6001	Ø 5.0 mm	52
	Vario SR plastic coping, crown, with triple-surface antirotation, burn-out	
J2563.6002	Ø 5.0 mm	52
	Vario SR plastic coping, crown, with single-surface antirotation, for angled Vario SR abutments, burn-out	
J2563.6003	Ø 5.0 mm	52
	Vario SR titanium cap, bridge, incl. Vario SR prosthetic screw	
J2564.4301	Ø 3.8/4.3 mm	52
J2564.6001	Ø 5.0 mm	52
	Vario SR impression cap, closed tray	
J2565.4300	Ø 3.8/4.3 mm	51
J2565.6000	Ø 5.0 mm	51
	Vario SR impression cap, open tray, incl. fixing screw	
J2566.4300	Ø 3.8/4.3 mm	51
J2566.6000	Ø 5.0 mm	51
	Vario SR analog	
J2567.4300	Ø 3.8/4.3 mm	51
J2567.6000	Ø 5.0 mm	51
	Vario SR protection cap	
J2568.4300	Ø 3.8/4.3 mm	52
J2568.6000	Ø 5.0 mm	52
	Vario SR aligning tool 20°, for insertion post, sterile	
J2569.0001	Ø 3.8/4.3/5.0 mm	53
	Vario SR aligning tool 30°, for insertion post, sterile	
J2569.0002	Ø 3.8/4.3/5.0 mm	53
	Vario SR base for bar, laser-weldable, incl. Vario SR prosthetic screw	
J2570.4300	Ø 3.8/4.3 mm	52
J2570.6000	Ø 5.0 mm	52
J3709.0015	Universal holder	62
	Reworking reamer, for base for bar abutment, burn-out, plane surface/cone seat	
J3711.0010	Ø 3.3/3.8/4.3/5.0 mm	62
	Reworking reamer, for base for bar abutment, burn-out, screw seat	
J3711.0020	Ø 3.3/3.8/4.3/5.0 mm	62
	Guide System Template drill	
J3713.3300	Ø 3.3 mm	29
J3713.4300	Ø 3.8/4.3 mm	29
	Guide System Guiding sleeves	
J3714.3303	Ø 3.3 mm	28
J3714.3803	Ø 3.8 mm	28
J3714.4303	Ø 4.3 mm	28
	Guide System Seating tool	
J3716.3300	Ø 3.3 mm	29
J3716.4300	Ø 3.8/4.3 mm	29
	Prosthetic screw, for bar abutments, hex, (also for Passive-Fit)	
J4005.1602	Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm.....	56

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page
	Screw, hex, for bar abutment, screw for bases for bar abutments for impression taking, open tray and soldering	
J4005.1610	Ø 3.3/3.8/4.3/5.0 mm, thread M 1.6 mm.....	54
	Vario SR prosthetic screw, hex	
J4005.2004	Ø 3.8/4.3/5.0 mm, thread M 2.0 mm.....	53
	Drill extension, ISO shaft	
J5002.0005	L 26.6 mm	32
J5002.0010	Adapter, ISO shaft for angled hand piece	33
J5002.0012	Cleaning needle for drills with internal irrigation ...	33
J5002.0020	Cleaning cannula for drills with internal irrigation..	33
	Depth stop SCREW-LINE for pilot drill (J5051.2000) and pre-drill (J5051.2800) with reduced coil	
J5015.0007	L 7 mm	17
J5015.0009	L 9 mm	17
J5015.0011	L 11 mm	17
J5015.0013	L 13 mm	17
	Depth stop for form drills SCREW-LINE, with reduced coil	
J5015.3300	Ø 3.3 mm	18
J5015.3800	Ø 3.8 mm	18
J5015.4300	Ø 4.3 mm	18
J5015.5000	Ø 5.0 mm	18
	Guide System Gingiva Punches	
J5041.3300	Ø 3.3 mm	28
J5041.3800	Ø 3.8 mm	28
J5041.4300	Ø 4.3 mm	28
	Guide System Pilot drill set	
J5043.3309	Ø 3.3 mm, L 9 mm	24
J5043.3311	Ø 3.3 mm, L 11 mm	24
J5043.3313	Ø 3.3 mm, L 13 mm	24
J5043.4307	Ø 3.8/4.3 mm, L 7 mm	24
J5043.4309	Ø 3.8/4.3 mm, L 9 mm	24
J5043.4311	Ø 3.8/4.3 mm, L 11 mm	25
J5043.4313	Ø 3.8/4.3 mm, L 13 mm	25
	Guide System Pilot drill	
J5044.3316	Ø 3.3 mm, L 16 mm	24
J5044.4316	Ø 3.8/4.3 mm, L 16 mm	25
	Guide System Surgery set, SCREW-LINE	
J5045.3309	Ø 3.3 mm, L 9 mm	25
J5045.3311	Ø 3.3 mm, L 11 mm	25
J5045.3313	Ø 3.3 mm, L 13 mm	25
J5045.3807	Ø 3.8 mm, L 7 mm	26
J5045.3809	Ø 3.8 mm, L 9 mm	26
J5045.3811	Ø 3.8 mm, L 11 mm	26
J5045.3813	Ø 3.8 mm, L 13 mm	26
J5045.4307	Ø 4.3 mm, L 7 mm	26
J5045.4309	Ø 4.3 mm, L 9 mm	26
J5045.4311	Ø 4.3 mm, L 11 mm	26
J5045.4313	Ø 4.3 mm, L 13 mm	26
	Guide System Form drill, SCREW-LINE	
J5046.3316	Ø 3.3 mm, L 16 mm	25
J5046.3816	Ø 3.8 mm, L 16 mm	26
J5046.4316	Ø 4.3 mm, L 16 mm	26
	Guide System Form drill, SCREW-LINE, Cortical bone	
J5048.3309	Ø 3.3 mm, L 9 mm	27
J5048.3311	Ø 3.3 mm, L 11 mm	27
J5048.3313	Ø 3.3 mm, L 13 mm	27
J5048.3316	Ø 3.3 mm, L 16 mm	27
J5048.3807	Ø 3.8 mm, L 7 mm	27
J5048.3809	Ø 3.8 mm, L 9 mm	27
J5048.3811	Ø 3.8 mm, L 11 mm	27

Art. No.	Article	Page
	Guide System Form drill, SCREW-LINE, Cortical bone	
J5048.3813	Ø 3.8 mm, L 13 mm	27
J5048.3816	Ø 3.8 mm, L 16 mm	27
J5048.4307	Ø 4.3 mm, L 7 mm	27
J5048.4309	Ø 4.3 mm, L 9 mm	27
J5048.4311	Ø 4.3 mm, L 11 mm	27
J5048.4313	Ø 4.3 mm, L 13 mm	27
J5048.4316	Ø 4.3 mm, L 16 mm	27
	Round bur, resterilizable	
J5050.2300	Ø 2.3 mm	17
J5050.3500	Ø 3.5 mm	17
	Pilot drill SCREW-LINE, reduced coil, resterilizable	
J5051.2000	Ø 2.0 mm	17
	Pilot drill without coil, resterilizable	
J5051.2003	Ø 2.0 mm	17
	Pre-drill SCREW-LINE, resterilizable	
J5051.2800	Ø 1.7-2.8 mm	17
	Form drill SCREW-LINE, with reduced coil, resterilizable	
J5052.3309	Ø 3.3 mm, L 9 mm	18
J5052.3311	Ø 3.3 mm, L 11 mm	18
J5052.3313	Ø 3.3 mm, L 13 mm	18
J5052.3316	Ø 3.3 mm, L 16 mm	18
J5052.3807	Ø 3.8 mm, L 7 mm	18
J5052.3809	Ø 3.8 mm, L 9 mm	18
J5052.3811	Ø 3.8 mm, L 11 mm	18
J5052.3813	Ø 3.8 mm, L 13 mm	18
J5052.3816	Ø 3.8 mm, L 16 mm	18
J5052.4307	Ø 4.3 mm, L 7 mm	18
J5052.4309	Ø 4.3 mm, L 9 mm	18
J5052.4311	Ø 4.3 mm, L 11 mm	18
J5052.4313	Ø 4.3 mm, L 13 mm	18
J5052.4316	Ø 4.3 mm, L 16 mm	18
J5052.5007	Ø 5.0 mm, L 7 mm	18
J5052.5009	Ø 5.0 mm, L 9 mm	18
J5052.5011	Ø 5.0 mm, L 11 mm	18
J5052.5013	Ø 5.0 mm, L 13 mm	18
J5052.5016	Ø 5.0 mm, L 16 mm	18
	Form drill SCREW-LINE, Cortical bone, resterilizable	
J5053.3316	Ø 3.3 mm	19
J5053.3816	Ø 3.8 mm	19
J5053.4316	Ø 4.3 mm	19
J5053.5016	Ø 5.0 mm	19
	Tap SCREW-LINE, with hexagon, resterilizable	
J5054.3309	Ø 3.3 mm	19
J5054.3809	Ø 3.8 mm	19
J5054.4309	Ø 4.3 mm	19
J5054.5009	Ø 5.0 mm	19
	Driver for screw implants, with ISO shaft for angled hand piece	
J5300.0007	L 27.5 mm	32
	Driver, short for screw implants, manual/wrench	
J5300.0008	L 18.0 mm	32
	Driver, long for screw implants, manual/wrench	
J5300.0009	L 27.0 mm	32
J5300.0010	Cardanic driver (30°)	33
	Driver for ball abutment, manual/wrench	
J5300.0011	L 18.3 mm	35

INDEX

ARTICLE NUMBERS

Art. No.	Article	Page
J5300.0030	PickUp instrument	33
J5300.0057	Surgery Set CAMLOG®/CONELOG® SCREW-LINE	16
	Paralleling pin SCREW-LINE	
J5300.2028	Ø 1.7-2.8/2.0 mm	32
	Guide System Check-up pin	
J5301.3300	Ø 3.3 mm	29
J5301.4300	Ø 3.8/4.3 mm	29
J5302.0010	Holding key for insertion post	33
	Holding sleeve for screw implants	
J5302.3300	Ø 3.3 mm	33
J5302.3800	Ø 3.8 mm	33
J5302.4300	Ø 4.3 mm	33
	Guide System Driver, manual/wrench	
J5303.4300	3.3/3.8/4.3 mm	29
	Guide System Driver, with ISO shaft for angled hand piece	
J5304.4300	3.3/3.8/4.3 mm	29
	Screwdriver Activator, for ball abutment matrix CM Dalbo®-Plus	35
J5315.0005	Screwdriver hex, short, manual/wrench	34
J5316.0501	Screwdriver hex, long, manual/wrench	34
J5316.0502	Screwdriver hex, long, ISO shaft	34
J5316.0503	Screwdriver hex, short, ISO shaft	34
J5316.0504	Screwdriver hex, extra short, manual/wrench	34
J5316.0510	Torque wrench	34
J5320.1030	Tap adapter for tap SCREW-LINE	
J5322.0010	L 18.0 mm short	32
J5322.0011	L 23.0 mm long	32
J5330.8500	Prosthetic tray (without content)	34
J5330.8600	Prosthetic set	34
	Pre-Osteotome SCREW-LINE, straight convex	
J5417.2800	Ø 1.7-2.8 mm	20, 21
	Osteotomy Set CAMLOG®/CONELOG® SCREW-LINE	
J5418.0020	straight convex	20
J5420.0020	straight concave	22
J5418.0030	angled convex	21
J5420.0030	angled concave	23
	Osteotome SCREW-LINE, straight convex	
J5418.3300	Ø 3.3 mm	20
J5418.3800	Ø 3.8 mm	20
J5418.4300	Ø 4.3 mm	20
J5418.5000	Ø 5.0 mm	20
	Osteotome SCREW-LINE, angled convex	
J5418.3310	Ø 3.3 mm	21
J5418.3810	Ø 3.8 mm	21
J5418.4310	Ø 4.3 mm	21
J5418.5010	Ø 5.0 mm	21
	Pre-Osteotome SCREW-LINE, straight concave	
J5419.2800	Ø 1.7-2.8 mm	22, 23
	Osteotome SCREW-LINE, straight concave	
J5420.3300	Ø 3.3 mm	22
J5420.3800	Ø 3.8 mm	22
J5420.4300	Ø 4.3 mm	22
J5420.5000	Ø 5.0 mm	22
	Osteotome SCREW-LINE, angled concave	
J5420.3310	Ø 3.3 mm	23
J5420.3810	Ø 3.8 mm	23
J5420.4310	Ø 4.3 mm	23
J5420.5010	Ø 5.0 mm	23
J8070.2050	Edentulous mandible incl. mounting plate	66

Art. No.	Article	Page
	ALTApin magazine	
M1000.0050	7 titanium pins, sterile, 1 unit	31
M1000.0100	7 titanium pins, sterile, 3 units	31
M5100.0010	ALTApin applicator, straight	31
M5100.0030	ALTApin applicator, angled 90°	31
M5100.0050	ALTApin pricker	31
M5100.0070	ALTApin membrane fixator	31
M5100.0100	ALTApin surgery mallet	31
M5200.0010	ALTApin applicator, straight, work element	31
M5200.0055	ALTApin pricker, insert	31
M5500.0050	ALTApin single patient drill, ISO shaft	31
M5600.0110	ALTApin set	31
M5600.0210	ALTApin tray (without content)	31

Adress/Stamp

Date/Signature

Your Customer no.

Order Form

Delivery
☐ normal ☐ express

Quantity	Article number	Description	Price

We thank you for your order.

CE0123

Art. No. J8001.0009 Rev.2 05/2014



HEADQUARTERS

CAMLOG Biotechnologies AG | Margarethenstrasse 38 | CH - 4053 Basel
Telefon +41 61 565 41 00 | Fax +41 61 565 41 01 | info@camlog.com | www.camlog.com

Manufacturer of CAMLOG®/CONELOG® Products: ALTATEC GmbH, Maybachstraße 5, D-71299 Wimsheim

camlog